



- I-I/I-3
- FI/F2/F3
- RI/R2
- R3
- Irrigation
- Forestry

**HANMIX INTERNATIONAL  
COMPANY LIMITED**

Add: Room 604, Building 1,  
Celebrity International, No.39  
Shiling Road Laoshan District,  
Qingdao, China

E-mail: [Info@hanmix.net](mailto:Info@hanmix.net)

**WWW.HANMIX.NET**

**Agricultural**

**tires**



Tel: +86 532 8086 7001  
+86 532 6888 7003  
Fax: +86 532 8086 7001

**WWW.HANMIX.NET**

# Introduction

Welcome to the Hanmix World. Hanmix is not only a brand name, but a way for a better life. You can find security, safety and high quality life in the Hanmix World.

Hanmix covers over 600 kinds of products, including Bicycle tires, PCR tires, OTR tires, Industrial Tires, Agricultural tires, TBR tires, TBB tires, LTB tires, Solid tires, Inner tubes, Flaps, Batteries and Valves.

Our product certified by DOT, ECE, CCC, GCC, can satisfy the customers' demands to the great extent. All of our products comply with international quality standards and are greatly appreciated in a variety of different markets throughout the world. Hanmix is a global brand name, which is providing better solutions for your demands.



## CERTIFICATE



# Agricultural

**RP-113 ..... 01**

**RP-114 ..... 02**

**RP-115 ..... 03**

**RP-116 ..... 04**

**RG-111 ..... 05**

**RG-112 ..... 06**

**RG-333 ..... 07**

**RG-111-IR ..... 08**

**RG-F66 ..... 09**

**I-1/I-3**

**F1/F2/F3**

**R1/R2**










**R3**

**Irrigation**

**Forestry**



# LIST OF TREAD PATTERNS

<b>I-1/I-3</b>	01 	02 
	<b>RP-113</b>	<b>RP-114</b>
<b>F1/F2/F3</b>	03 	04 
	<b>RP-115</b>	<b>RP-116</b>
<b>R1/R2</b>	05 	06 
	<b>RG-111</b>	<b>RG-112</b>
<b>R3</b>	07 	08 
	<b>RG-333</b>	<b>Irrigation</b> <b>RG-111-IR</b>
<b>Forestry</b>	09 	<b>RG-F66</b>

Tyre size	Tread pattern	Page
<b>12"</b> SIZE(INCH)		
10.0/80-12	RP-114	<b>02</b>
<b>14"</b>		
9.5L-14	RP-113	<b>01</b>
11L-14	RP-113	<b>01</b>
<b>15"</b>		
760L-15	RP-113	<b>01</b>
9.5L-15	RP-113	<b>01</b>
11L-15	RP-113	<b>01</b>
12.5L-15	RP-113	<b>01</b>
<b>15.3"</b>		
10.0/75-15.3	RP-114	<b>02</b>
11.0/80-15.3	RP-114	<b>02</b>
12.0/80-15.3	RP-114	<b>02</b>
<b>16"</b>		
750-16	RP-113	<b>01</b>
600-16	RP-113	<b>01</b>

Tyre size	Tread pattern	Page
<b>12"</b> SIZE(INCH)		
5.00-12	RG-333	
6.00-12	RG-333	
<b>14"</b>		
6.00-14	RG-333	
<b>16"</b>		
6.00-16	RG-333	
6.50-16	RG-333	
7.50-16	RG-333	
<b>20"</b>		
7.50-20	RG-333	
8.3-20	RG-333	
9.5-20	RG-333	
<b>24"</b>		
15-24	RG-333	
8.3-24	RG-333	
9.5-24	RG-333	
12.4-24	RG-333	
11.2-24	RG-333	
13.6-24	RG-333	
14.9-24	RG-333	
<b>26"</b>		
23.1-26	RG-333	
<b>28"</b>		
12.4-28	RG-333	
13.6-28	RG-333	
14.9-28	RG-333	
16.9-28	RG-333	
16.9-28	RG-333	
16.9-30	RG-333	
16.9-30	RG-333	
16.9-34	RG-333	
16.9-34	RG-333	
11.2-38	RG-333	
15.5-38	RG-333	
18.4-38	RG-333	
20.8-38	RG-333	

Tyre size	Tread pattern	Page
<b>12"</b> SIZE(INCH)		
4.00-12	RP-115	
<b>14"</b>		
4.00-14	RP-115	
<b>15"</b>		
5.00-15	RP-115	
760L-15	RP-115	
7.5L-15	RP-115	
9.5L-15	RP-115	
12.5L-15	RP-115	
11L-15	RP-115	
<b>16"</b>		
5.50-16	RP-115	
6.00-16	RP-115	
6.50-16	RP-115	
7.50-16	RP-115	
9.00-16	RP-115	
"10.00-163RIB/4RIB"	RP-115	
"11.00-163RIB/4RIB"	RP-115	
550-16	RP-116	
600-16	RP-116	
<b>18"</b>		
7.50-18	RP-115	
<b>20"</b>		
6.50-20	RP-115	
7.50-20	RP-115	

Tyre size	Tread pattern	Page
<b>12"</b> SIZE(INCH)		
600-12	RG-111-IR	
<b>16"</b>		
650-16	RG-111-IR	
750-16	RG-111-IR	
<b>20"</b>		
8.3-20	RG-111-IR	
<b>24"</b>		
8.3-24	RG-111-IR	
9.5-24	RG-111-IR	
11.2-24	RG-111-IR	
<b>28"</b>		
12.4-28	RG-111-IR	
<b>30"</b>		
14.9-30	RG-111-IR	
16.9-30	RG-111-IR	
<b>32"</b>		
11-32	RG-111-IR	
<b>34"</b>		
16.9-34	RG-111-IR	

Tyre size	Tread pattern	Page
<b>25"</b> SIZE(INCH)		
66*43.00-25	RG-F66	




Tyre size	Tread pattern	Page
	<b>12"</b> SIZE(INCH)	
550	RG-111/2	
	<b>14"</b>	
600-14	RG-111/2	
	<b>16"</b>	
600-16	RG-111/2	
650-16	RG-111/2	
7.50-16	RG-111/2	
	<b>17"</b>	
500-17	RG-111/2	
	<b>20"</b>	
7.50-20	RG-111/2	
8.3-20	RG-111/2	
8.5-20	RG-111/2	<b>05</b>
9.5-20	RG-111/2	
	<b>24"</b>	
8.3-24	RG-111/2	
9.5-24	RG-111/2	
11.2-24	RG-111/2	
12.4-24	RG-111/2	
13.6-24	RG-111/2	
14.9-24	RG-111/2	
23.1-24	RG-111/2	
	<b>26"</b>	
14.9-26	RG-111/2	
18.4-26	RG-111/2	<b>06</b>
23.1-26	RG-111/2	
	<b>28"</b>	
11.2-28	RG-111/2	
12.4-28	RG-111/2	
13.6-28	RG-111/2	
14.9-28	RG-111/2	
16.9-28	RG-111/2	
	<b>30"</b>	
14.9-30	RG-111/2	
16.9-30	RG-111/2	
	<b>38"</b>	
12-38	RG-111/2	
15.5-38	RG-111/2	
18.4-38	RG-111/2	
20.8-38	RG-111/2	


INCH	SIZE	TYPE	PR	STD RIM	MAX.PRESSURE	Tire Dimension	
						OVERALL DIAMETER (MM)	SECTION WIDTH (MM)
					KPA		
15	760L-15	I1/13	8	5.5	360	734	193
15	9.5L-15	I1/13	8	8LB	280	780	240
14	9.5L-14	I1/13	8	7	300	741	241
15	11L-15	I1/13	8	8LB	280	810	280
15	11L-15	I1/13	12	8LB	280	810	280
14	11L-14	I1/13	8	8LB	280	750	280
16	11L-16	I1/13	8	8LB	280	835	280
15	12.5L-15	I1/13	12	10	360	823	318
16	750-16	I1/13	8	5.50F	280	808	203
16	600-16	I1/13	8	4.00E	240	739	159

# RP-114



INCH	SIZE	TYPE	PR	STD RIM	MAX. LOAD KG	MAX. PRESSURE KPA	Tire Dimension	
							OVERALL DIAMETER (MM)	SECTION WIDTH (MM)
12	10.0/80-12	I/3	8	9	1250	390	710	264
15.3	10.0/75-15.3	I/3	10	9	1525	390	760	264
15.3	11.5/80-15.3	I/3	12	9	2145	410	865	290
15.3	12.5/80-15.3	I/3	14	9	2810	510	875	307

# RP-115

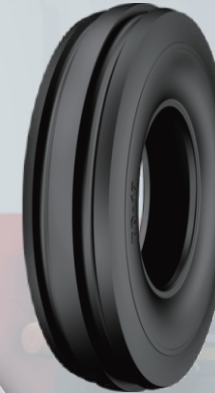

INCH	SIZE	TYPE	PR	STD RIM	MAX. PRESSURE KPA	Tire Dimension	
						OVERALL DIAMETER (MM)	SECTION WIDTH (MM)
12	4.00-12	F1/F2/F3	4	3.00D	340	535	110
14	4.00-14	F1/F2/F3	4	3.00D	340	590	110
15	5.00-15	F1/F2/F3	4	3.00D	280	640	130
16	5.50-16	F1/F2/F3	6	4.00E	370	710	150
16	6.00-16	F1/F2/F3	8	4.00E	450	740	160
16	6.50-16	F1/F2/F3	8	4.50E	420	760	175
20	6.50-20	F1/F2/F3	8	5.00F	360	860	180
15	7.5L-15	F1/F2/F3	8	6LB	370	745	208
16	7.50-16	F1/F2/F3	8	5.50F	370	810	205
18	7.50-18	F1/F2/F3	8	5.50F	370	860	205
20	7.50-20	F1/F2/F3	8	5.50F	370	910	205
16	9.00-16	F1/F2/F3	8	6.50H	400	880	210
15	9.5L-15	F1/F2/F3	8	8LB	310	780	240
15	11L-15	F1/F2/F3	8	8LB	340	810	280
16	10.00-16 3RIB/4RIB	F1/F2/F3	10	W8L	340	910	275
16	11.00-16 3RIB/4RIB	F1/F2/F3	10	W10L	310	970	315

# RP-116



INCH	SIZE	TYPE	PR	STD RIM	MAX. LOAD KG	MAX. PRESSURE KPA	Tire Dimension	
							OVERALL DIAMETER (MM)	SECTION WIDTH (MM)
16	550-16	F1/F2/F3	10	4.00E	1350	530	670	110
16	600-16	F1/F2/F3	10	4.50E	850	530	680	120

# RG-111



INCH	SIZE	TYPE	PR	STD RIM	MAX. LOAD KG	MAX. PRESSURE KPA	Tire Dimension	
							OVERALL DIAMETER (MM)	SECTION WIDTH (MM)
17	550-17	R1/R2	6	1.00E	400	280	750	138
12	600-12	R1/R2	8	4.50E	450	300	640	165
16	600-16	R1/R2	8	4.50E	550	300	745	165
14	600-14	R1/R2	8	4.50E	495	250	670	150
16	650-16	R1/R2	8	5.00F	620	300	765	180
16	7.50-16	R1/R2	8	5.5F	730	260	810	205
20	7.50-20	R1/R2	8	5.5F	860	260	910	205
20	8.3-20	R1/R2	8	W7	785	300	895	210
24	8.3-24	R1/R2	8	W7	920	300	995	210
20	8.5-20	R1/R2	8	W7	780	250	875	195
20	9.5-20	R1/R2	8	W8	955	280	950	240
24	9.5-24	R1/R2	8	W8	1110	280	1050	240
24	11.2-24	R1/R2	8	W10	1225	240	1105	285
28	11.2-28	R1/R2	8	W10	1305	240	1205	285
32	11-32	R1/R2	8	W10	1080	160	1460	305
24	12.4-24	R1/R2	8	W11	1415	230	1160	315
28	12.4-28	R1/R2	8	W11	1510	230	1260	315
38	12-38	R1/R2	10	W11	1930	200	1575	330
24	13.6-24	R1/R2	8	W12	1545	210	1210	345
28	13.6-28	R1/R2	8	W12	1645	210	1310	345
24	14.9-24	R1/R2	10	W13	1990	230	1265	378
26	14.9-26	R1/R2	10	W13	2055	230	1315	378
28	14.9-28	R1/R2	10	W13	2120	230	1365	378
30	14.9-30	R1/R2	10	W13	2190	230	1415	378
38	15.5-38	R1/R2	10	W14	2320	230	1570	395
28	16.9-28	R1/R2	10	W15L	2380	200	1435	430
30	16.9-30	R1/R2	12	W15L	2730	240	1485	430
34	16.9-34	R1/R2	12	W15L	2820	230	1585	430
26	18.4-26	R1/R2	12	DW16	2985	230	1450	467
30	18.4-30	R1/R2	12	W16L	3180	230	1550	467
34	18.4-34	R1/R2	12	W16L	3375	230	1655	467
38	18.4-38	R1/R2	12	W16L	3575	230	1755	467
38	20.8-38	R1/R2	12	W18L	4450	240	1835	528
26	23.1-26	R1/R2	12	DW16	2985	230	1450	467

# RG-112



INCH	SIZE	TYPE	PR	STD RIM	MAX. LOAD	MAX. PRESSURE	Tire Dimension	
					KG	KPA	OVERALL DIAMETER (MM)	SECTION WIDTH (MM)
17	550-17	R1/R2	6	1.00E	400	280	750	138
12	600-12	R1/R2	8	4.50E	450	300	640	165
16	600-16	R1/R2	8	4.50E	550	300	745	165
14	600-14	R1/R2	8	4.50E	495	250	670	150
16	650-16	R1/R2	8	5.00F	620	300	765	180
16	7.50-16	R1/R2	8	5.5F	730	260	810	205
20	7.50-20	R1/R2	8	5.5F	860	260	910	205
20	8.3-20	R1/R2	8	W7	785	300	895	210
24	8.3-24	R1/R2	8	W7	920	300	995	210
20	8.5-20	R1/R2	8	W7	780	250	875	195
20	9.5-20	R1/R2	8	W8	955	280	950	240
24	9.5-24	R1/R2	8	W8	1110	280	1050	240
24	11.2-24	R1/R2	8	W10	1225	240	1105	285
28	11.2-28	R1/R2	8	W10	1305	240	1205	285
32	11-32	R1/R2	8	W10	1080	160	1460	305
24	12.4-24	R1/R2	8	W11	1415	230	1160	315
28	12.4-28	R1/R2	8	W11	1510	230	1260	315
38	12-38	R1/R2	10	W11	1930	200	1575	330
24	13.6-24	R1/R2	8	W12	1545	210	1210	345
28	13.6-28	R1/R2	8	W12	1645	210	1310	345
24	14.9-24	R1/R2	10	W13	1990	230	1265	378
26	14.9-26	R1/R2	10	W13	2055	230	1315	378
28	14.9-28	R1/R2	10	W13	2120	230	1365	378
30	14.9-30	R1/R2	10	W13	2190	230	1415	378
38	15.5-38	R1/R2	10	W14	2320	230	1570	395
28	16.9-28	R1/R2	10	W15L	2380	200	1435	430
30	16.9-30	R1/R2	12	W15L	2730	240	1485	430
34	16.9-34	R1/R2	12	W15L	2820	230	1585	430
26	18.4-26	R1/R2	12	DW16	2985	230	1450	467
30	18.4-30	R1/R2	12	W16L	3180	230	1550	467
34	18.4-34	R1/R2	12	W16L	3375	230	1655	467
38	18.4-38	R1/R2	12	W16L	3575	230	1755	467
38	20.8-38	R1/R2	12	W18L	4450	240	1835	528
26	23.1-26	R1/R2	12	DW16	2985	230	1450	467

# RG-333



INCH	SIZE	TYPE	PR	TRADE DEPTH MM	STD RIM	MAX. LOAD	MAX. PRESSURE	Tire Dimension	
						KG	KPA	OVERALL DIAMETER (MM)	SECTION WIDTH (MM)
26	23.1-26	R3	12	16	DW20	3655	170	595	1500
38	20.8-38	R3	12	38	W18L	4000	200	528	1835
38	18.4-38	R3	12	37	W16L	3575	200	467	1755
34	18.4-34	R3	12	36	W16L	3375	200	467	1655
30	18.4-30	R3	12	36	W16L	3180	200	467	1550
26	18.4-26	R3	12	35	DW16	/	/	467	1450
38	15.5-38	R3	10	34	W14L	2540	270	395	1570
38	11.2-38	R3	8	24	W10	1350	250	285	1448
34	16.9-34	R3	8	34	W15L	2380	170	430	1585
30	16.9-30	R3	8	36	W15L	2245	170	430	1485
28	16.9-28	R3	8	35	W15L	2175	170	430	1435
30	14.9-30	R3	8	32	W13	1940	180	378	1415
28	14.9-28	R3	8	34	W13	1880	180	378	1365
24	14.9-24	R3	8	22	W13	1760	180	378	1265
28	13.6-28	R3	8	32	W12	1645	210	345	1310
24	13.6-24	R3	10	32	W12	1790	250	345	1210
24	11.2-24	R3	8	30	W10	1465	210	285	1205
28	12.4-28	R3	8	31	W11	1785	200	315	1315
24	12.4-24	R3	8	30	W11	1415	230	315	1160
24	9.5-24	R3	8	28	W8	1315	240	240	1150
24	8.3-24	R3	8	27	W7	1135	270	210	1050
20	9.5-20	R3	8	28	W8	1140	240	240	1050
20	8.3-20	R3	8	28	W7	785	300	210	895
16	7.50-16	R3	8	24	5.50F	750	300	195	890
20	7.50-20	R3	8	24	5.50F	860	260	205	910
16	6.50-16	R3	8	22	5.50F	565	250	195	830
24	15-24	R3	10	32	W14	2800	280	400	1310
16	6.00-16	R3	8	19	4.50E	550	300	165	745
14	6.00-14	R3	8	/	4.50E	/	/	165	690
12	6.00-12	R3	8	20	4.50E	450	300	165	640
12	5.00-12	R3	8	15	4.00E	280	200	145	590

## RG-111-IR



## RG-F66



INCH	SIZE	TYPE	PR	STD RIM	MAX. LOAD KG	MAX. PRESSURE KPA	Tire Dimension	
							OVERALL DIAMETER (MM)	SECTION WIDTH (MM)
12	600-12	Irrigation	6	5.00F	425	270	690	165
16	650-16	Irrigation	6	5.00F	565	250	830	165
16	750-16	Irrigation	6	5.50F	750	300	890	195
20	8.3-20	Irrigation	6	W7	970	270	950	210
24	8.3-24	Irrigation	6	W7	1135	270	1050	210
24	9.5-24	Irrigation	6	W8	1315	240	1150	240
24	11.2-24	Irrigation	6	W10	1465	210	1205	285
32	11-32	Irrigation	6	W10	1080	160	1460	305
28	12.4-28	Irrigation	6	W11	1785	200	1315	315
24	14.9-24	Irrigation	10	W13	1760	180	1265	378
30	14.9-30	Irrigation	10	W13	3065	260	1495	378
30	16.9-30	Irrigation	10	W15	2465	200	1585	430
34	16.9-34	Irrigation	10	W15	3385	220	1670	430

INCH	SIZE	TYPE	PR	TRADE DEPTH MM	STD RIM	MAX. LOAD KG	MAX. PRESSURE KPA	Tire Dimension	
								OVERALL DIAMETER (MM)	SECTION WIDTH (MM)
25	66*43.00-25	Forestry	10	25	36	2050	180	1650	1050
25	66*43.00-25	Forestry	12	25	36	2250	220	1650	1050