

WE START  
WHERE  
THE ROAD  
ENDS



**CONSTRUCTION  
TIRES & TRACKS  
DATABOOK 2017**

# GENERAL REFERENCE DATA

## LOAD INDEX EQUIVALENCES in kg and lb

LI	kg	lb	LI	kg	lb	LI	kg	lb	LI	kg	lb	LI	kg	lb	LI	kg	lb
100	800	1,764	121	1,450	3,200	142	2,650	5,840	160	4,500	9,920	181	8,250	18,190	202	15,000	33,070
101	825	1,819	122	1,500	3,310	143	2,725	6,010	161	4,625	10,200	182	8,500	18,740	203	15,500	34,180
102	850	1,874	123	1,550	3,420	144	2,800	6,170	162	4,750	10,470	183	8,750	19,290	204	16,000	35,280
103	875	1,929	124	1,600	3,530	145	2,900	6,390	163	4,875	10,750	184	9,000	19,840	205	16,500	36,380
104	900	1,985	125	1,650	3,640	146	3,000	6,610	164	5,000	11,020	185	9,250	20,390	206	17,000	37,480
105	925	2,040	126	1,700	3,750	147	3,075	6,780	165	5,150	11,350	186	9,500	20,940	207	17,500	38,590
106	950	2,095	127	1,750	3,860	148	3,150	6,950	166	5,300	11,690	187	9,750	21,500	208	18,000	39,690
110	1,060	2,337	128	1,800	3,970	149	3,250	7,170	170	6,000	13,230	188	10,000	22,050	209	18,500	40,790
111	1,090	2,403	129	1,850	4,080	150	3,350	7,390	171	6,150	13,560	189	10,300	22,710	210	19,000	41,890
112	1,120	2,470	130	1,900	4,190	151	3,450	7,610	172	6,300	13,890	190	10,600	23,370	211	19,500	43,000
113	1,150	2,536	131	1,950	4,300	152	3,550	7,830	173	6,500	14,330	191	10,900	24,030	212	20,000	44,100
114	1,180	2,602	132	2,000	4,410	153	3,650	8,050	174	6,700	14,770	192	11,200	24,690	213	20,600	45,420
115	1,215	2,679	133	2,060	4,540	154	3,750	8,270	175	6,900	15,210	193	11,500	25,360	214	21,200	46,750
116	1,250	2,756	134	2,120	4,670	155	3,875	8,540	176	7,100	15,650	194	11,800	26,020	215	21,800	48,070
117	1,285	2,833	135	2,180	4,810	156	4,000	8,820	177	7,300	16,090	195	12,150	26,790	216	22,400	49,390
118	1,320	2,911	136	2,240	4,940	157	4,125	9,090	178	7,500	16,530	196	12,500	27,560	217	23,000	50,700
119	1,360	2,999	140	2,500	5,510	158	4,250	9,370	179	7,750	17,090	200	14,000	30,870	218	23,600	52,040
120	1,400	3,090	141	2,575	5,680	159	4,375	9,650	180	8,000	17,640	201	14,500	31,970	219	24,300	53,580

## INFLATION UNITS

Kpa	Bar	Psi	kg/cm²
100	1	14.5	1.0
150	1.5	22	1.5
200	2	29	2
250	2.5	36	2.6
300	3	44	3.1
350	3.5	51	3.6
400	4	58	4.1
450	4.5	65	4.6
500	5	73	5.1
550	5.5	80	5.6
600	6	87	6.1
650	6.5	94	6.6
700	7	102	7.1
750	7.5	109	7.7
800	8	116	8.2
850	8.5	123	8.7
900	9	131	9.2
950	9.5	138	9.7
1000	10	145	10.2
1050	10.5	152	10.7

## SPEED INDEX

Speed km/h	Speed index
5	A1
10	A2
15	A3
20	A4
25	A5
40	A8
50	B

# TABLE OF CONTENTS

## CONSTRUCTION TIRES

### TIRES FOR SKID STEER LOADERS

- CAMSO SKS 732 \_\_\_\_\_ 4
- CAMSO SKS 532 \_\_\_\_\_ 5
- CAMSO SKS 332 Formerly Solideal Gripper \_\_\_\_\_ 6
- CAMSO SKS 753 \_\_\_\_\_ 7
- CAMSO SKS 775 \_\_\_\_\_ 8
- CAMSO HAULER SKS \_\_\_\_\_ 10
- CAMSO XTRA WALL \_\_\_\_\_ 12
- CAMSO HAULER SKZ \_\_\_\_\_ 14
- CAMSO SKS 774 Formerly Solideal Hauler XD44 \_\_\_\_\_ 16
- CAMSO SKS 511 Formerly Solideal SKS R1 \_\_\_\_\_ 17
- CAMSO SKS 792S Formerly Solideal SolidAir SKS \_\_\_\_\_ 18
- CAMSO SKS 782S Formerly Solideal Safetymaster SKS \_\_\_\_\_ 19
- CAMSO SKS 793S \_\_\_\_\_ 20
- CAMSO SKS 796S Formerly Solideal SolidAir SM \_\_\_\_\_ 21
- CAMSO SKS 786S Formerly Solideal Safetymaster SM \_\_\_\_\_ 22

### TIRES FOR BACKHOE LOADERS

- CAMSO SL R4 \_\_\_\_\_ 24
- CAMSO BHL 532 Formerly Solideal SLA R4 \_\_\_\_\_ 28
- CAMSO BHL 753 Formerly Solideal BHZ \_\_\_\_\_ 30
- CAMSO BHL 530 Formerly Solideal MR F3 \_\_\_\_\_ 32

### TIRES FOR TELESCOPIC HANDLERS

- CAMSO TLH 732 \_\_\_\_\_ 34
- CAMSO TLH 532 Formerly Solideal TH2 \_\_\_\_\_ 36
- CAMSO TLH 753 \_\_\_\_\_ 38
- CAMSO SL G2 \_\_\_\_\_ 40
- CAMSO SL G3 \_\_\_\_\_ 42
- CAMSO TLH 792S Formerly Solideal SolidAir TLH \_\_\_\_\_ 44

### TIRES FOR TELESCOPIC HANDLERS, COMPACT WHEEL LOADERS AND MINI-DUMPERS

- CAMSO TM R4 \_\_\_\_\_ 46
- CAMSO MPT 753 \_\_\_\_\_ 48
- CAMSO 4L I3 \_\_\_\_\_ 50
- CAMSO 4L R1 \_\_\_\_\_ 52
- CAMSO TM R1 \_\_\_\_\_ 54
- CAMSO MPT 793S \_\_\_\_\_ 55

### TIRES FOR WHEEL EXCAVATORS

- CAMSO WL \_\_\_\_\_ 56
- CAMSO WEX 552 Formerly Solideal WEX \_\_\_\_\_ 58
- CAMSO WEX 583S Formerly Solideal Bagger HT \_\_\_\_\_ 60

### TIRES FOR COMPACTION EQUIPMENT

- CAMSO CMP 533 \_\_\_\_\_ 61
- CAMSO CMP 576 Formerly Solideal SM C1 \_\_\_\_\_ 62

### TIRES FOR LOAD HAUL DUMP EQUIPMENT

- CAMSO MST 776 \_\_\_\_\_ 63

### TIRES FOR WHEEL LOADERS, ARTICULATED DUMP TRUCKS AND MOTOR GRADERS

- CAMSO WHL 753R Formerly Solideal SRGP \_\_\_\_\_ 64
- CAMSO ADT 753R Formerly Solideal SRAT \_\_\_\_\_ 66
- CAMSO WHL 775R Formerly Solideal SRLD L5 \_\_\_\_\_ 68
- CAMSO WHL 776R Formerly Solideal SRLS L5S \_\_\_\_\_ 70
- CAMSO LM L2 \_\_\_\_\_ 72
- CAMSO LM L3 \_\_\_\_\_ 74
- CAMSO WHL 773 \_\_\_\_\_ 78
- CAMSO WHL 775 \_\_\_\_\_ 80

## CONSTRUCTION TRACKS

### TRACKS FOR MINI-EXCAVATORS

- CAMSO MEX HXD \_\_\_\_\_ 82
- CAMSO MEX SD \_\_\_\_\_ 84

### TRACKS FOR COMPACT TRACK LOADERS

- CAMSO CTL HXD \_\_\_\_\_ 86
- CAMSO CTL SD \_\_\_\_\_ 87

### SPROCKETS FOR COMPACT TRACK LOADERS

- CAMSO CTL SPROCKET \_\_\_\_\_ 88

### TRACKS FOR MULTI-TERRAIN LOADERS

- CAMSO MTL HXD \_\_\_\_\_ 89

### OTT TRACKS FOR SKID STEER LOADERS

- CAMSO OTT HXD \_\_\_\_\_ 90

### TRACKS FOR PAVERS

- CAMSO HXD SMOOTH \_\_\_\_\_ 91
- CAMSO HXD CHEVRON \_\_\_\_\_ 92

### TRACKS FOR CARRIERS

- CAMSO CARRIER HXD \_\_\_\_\_ 93

## COMPLETE LINE OVERVIEW



# CAMSO SKS 732

## THE ULTIMATE OFF-ROAD SKID STEER TIRE SOLUTION

### FEATURES

- Massive tread depth with optimized lug-to-void ratio
- New impact guard sidewall design
- New wraparound stepped tread design
- Innovative curved and tapered tread lugs

### BENEFITS

- Maximizes off-road durability and traction
- Deflects debris to better protect sidewalls and reduce stress cracking
- Maximizes tread cleanout for best off-road traction
- Enhances traction and ensures even wearing

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



#	TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL
				RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.		
A	10-16.5 NHS	10	TL	8.25	-	780	276	23	359	2361	-	-
						30.6	10.4	29	14.1	93.0		
B	12-16.5 NHS	10	TL	9.75	-	836	330	25	585	2520	-	-
						32.9	13.0	31	23.0	99.2		
C	12-16.5 NHS	12	TL	9.75	-	833	330	26	383	2512	-	-
						32.5	13.0	33	15.1	98.9		
D	14-17.5 NHS	14	TL	10.5	-	935	360	32	425	2845	-	-
						36.8	14.2	40	16.7	112.0		

#	INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]						
		STATIC	10 km/h 5 mph	15 km/h 10 mph	20 km/h 12.5 mph	30 km/h 20 mph	40 km/h 25 mph	50 km/h 30 mph
A	5.20	3375	2135	1685	1625	1450	1410	1345
	75	7440	4710	3720	3580	3205	3110	2965
B	4.50	4015	2540	2005	1930	1725	1675	1600
	65	8850	5600	4425	4255	3810	3695	3530
C	5.50	4525	2865	2265	2175	1950	1890	1805
	80	9985	6320	4995	4805	4300	4170	3980
D	5.50	6125	3875	3060	2945	2635	2560	2440
	80	13495	8540	6745	6490	5805	5635	5380



# CAMSO SKS 532

## BEST GENERAL DUTY SOLUTION

### FEATURES

- Extra-deep tread depth with curved tread lugs
- Self cleaning stepped tread
- New impact guard sidewall design
- Void guard impact protection

### BENEFITS

- Ensures great durability and extra traction
- Maximizes cleanout for improved off-road traction
- Deflects debris to better protect sidewalls and reduce stress cracking
- Protects from tread punctures to minimize flat tires

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



#	TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL
				RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.		
A	10-16.5 NHS	10	TL	8.25	-	768	278	18	356	2316	-	-
						30.2	10.9	23	14.0	91.2		
B	12-16.5 NHS	12	TL	9.75	-	831	330	19	383	2513	-	-
						32.7	13.0	24	15.1	98.9		
C	14-17.5 NHS	14	TL	10.5	-	925	351	24	423	2789	-	-
						36.4	13.8	30	16.7	109.8		

#	INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]						
		STATIC	10 km/h 5 mph	15 km/h 10 mph	20 km/h 12.5 mph	30 km/h 20 mph	40 km/h 25 mph	50 km/h 30 mph
A	5.20	3375	2135	1685	1625	1450	1410	1345
	75	7440	4710	3720	3580	3205	3110	2965
B	5.50	4525	2865	2265	2175	1950	1890	1805
	80	9985	6320	4995	4805	4300	4170	3980
C	5.50	6125	3875	3060	2945	2635	2560	2440
	80	13495	8540	6745	6490	5805	5635	5380



# CAMSO SKS 332

Formerly Solideal Gripper

## RELIABLE PERFORMANCE AND QUALITY

### FEATURES

- Deep lug design
- Lower lug-to-void ratio
- Premium rubber compounds

### BENEFITS

- Provides good durability and traction in light-duty conditions
- Provides good traction in off-road conditions
- Provides good chunk and tear resistance

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



# CAMSO SKS 753

## VERSATILITY AND DURABILITY

### FEATURES

- Innovative non-directional tread pattern
- High lug-to-void ratio
- New impact guard sidewall design
- Stepped shoulder lugs

### BENEFITS

- Optimizes durability and versatility on mixed and hard surfaces
- Provides excellent wear and puncture resistance
- Deflects debris to better protect sidewalls and reduce stress cracking
- Enhances traction in softer surfaces

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



#	TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL
				RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.		
A	10-16.5 NHS	8	TL	8.25	-	762	271	14	345	2313	-	-
						30.0	10.7	18	13.6	91.1		
B	12-16.5 NHS	10	TL	9.75	-	819	318	18	370	2521	-	-
						32.2	12.5	23	14.6	99.3		

#	INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]						
		STATIC	10 km/h 5 mph	15 km/h 10 mph	20 km/h 12.5 mph	30 km/h 20 mph	40 km/h 25 mph	50 km/h 30 mph
A	4.10	2970	1880	1485	1430	1280	1240	1185
	60	6540	4140	3270	3145	2815	2730	2610
B	4.50	4015	2540	2005	1930	1725	1675	1600
	65	8850	5600	4425	4255	3810	3695	3530

#	TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL
				RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.		
A	10-16.5 NHS	10	TL	8.25	-	791	268	29	367	2386	-	-
						31.1	10.6	37	14.4	93.9		
B	12-16.5 NHS	12	TL	9.75	-	837	326	29	388	2496	-	-
						33.0	12.8	37	15.3	98.3		
C	14-17.5 NHS	14	TL	10.5	-	950	357	40	436	2861	-	-
						37.4	14.1	50	17.2	112.6		

#	INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]						
		STATIC	10 km/h 5 mph	15 km/h 10 mph	20 km/h 12.5 mph	30 km/h 20 mph	40 km/h 25 mph	50 km/h 30 mph
A	5.20	3375	2135	1685	1625	1450	1410	1345
	75	7440	4710	3720	3580	3205	3110	2965
B	5.50	4525	2865	2265	2175	1950	1890	1805
	80	9985	6320	4995	4805	4300	4170	3980
C	5.50	6125	3875	3060	2945	2635	2560	2440
	80	13495	8540	6745	6490	5805	5635	5380



# CAMSO SKS 775

## THE VERSATILE HEAVY-DUTY CHOICE

### FEATURES

- Massive 50/32 tread depth with high lug-to-void ratio
- Innovative tread pattern
- New impact guard sidewall design
- Stepped tread design shoulder lugs

### BENEFITS

- Maximizes tire life and tread impact resistance
- Optimizes traction and versatility for mixed and hard surface applications
- Deflects debris to better protect sidewalls and reduce stress cracking
- Provides lower cost per hour and quicker installation

### PERFORMANCE



#	TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [Inches]					LOAD INDEX	SPEED SYMBOL
				RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.		
A	10-16.5 NHS	10	TL	8.25	-	780	270	38	364	2365	-	-
						30.7	10.6	48	14.3	93.1		
B	12-16.5 NHS	12	TL	9.75	-	850	328	40	394	2575	-	-
						33.5	12.9	50	15.5	101.4		

#	INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]						
		STATIC	10 km/h 5 mph	15 km/h 10 mph	20 km/h 12.5 mph	30 km/h 20 mph	40 km/h 25 mph	50 km/h 30 mph
A	5.20	3375	2135	1685	1625	1450	1410	1345
	75	7440	4710	3720	3580	3205	3110	2965
B	5.50	4525	2865	2265	2175	1950	1890	1805
	80	9985	6320	4995	4805	4300	4170	3980







# CAMSO XTRA WALL

**BUILT FOR TOUGH OFF-ROAD APPLICATIONS**

TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE [bar] [psi]
			RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.			
5.70-12 NHS	4	TL	-	4.50-1-70 4.50-1-90 5JA	566	158	13	267	1707	-	-	4.10
					22.3	6.2	16	10.5	67.2			60
23 x 8.50-12 SS	6	TL	-	7.00-1-70 7.00-1-90 7JA	572	213	15	256	1723	-	-	3.40
					22.5	8.4	18	10.1	67.8			50
26 x 12.00-12 SS	10	TL	-	-	655	297	22	297	1955	-	-	4.50
					25.8	11.7	27	11.7	77.0			65
27 x 10-12	14	TT	8.00G	-	689	261	19	301	2054	143	A5	7.00
					27.1	10.3	24	11.9	80.9			102
7.00-15 SS	6	TL	-	5.50F 6LB	780	221	19	363	2359	-	-	4.10
					30.7	8.7	24	14.3	92.9			60
27 x 8.50-15 NHS	6	TL	7JA	-	681	225	15	309	2026	96	B	3.10
					26.8	8.9	19	12.2	79.8			45
31 x 15.50-15 NHS	8	TL	13LB	-	788	384	24	365	2352	116	B	3.10
					31.0	15.1	30	14.4	92.6			45
10-16.5 NHS	8	TL	8.25	-	766	277	17	349	2277	-	-	4.10
					30.1	10.9	21	13.7	89.6			60
10-16.5 NHS	10	TL	8.25	-	765	276	18	348	2306	-	-	5.20
					30.1	10.9	23	13.7	90.8			75
10-16.5 NHS	12	TL	8.25	-	-	-	-	-	-	-	-	6.20
					-	-	-	-	-			90
12-16.5 NHS	10	TL	9.75	-	818	320	18	371	2497	-	-	4.50
					32.2	12.6	23	14.6	98.3			65
12-16.5 NHS	12	TL	9.75	-	811	320	18	372	2459	-	-	5.50
					31.9	12.6	23	14.6	96.8			80
26 x 12-16.5 (300/40-16.5)	10	TL	9.75	-	663	283	24	303	1986	-	-	4.00
					26.1	11.1	30	11.9	78.2			57
14-17.5 NHS	12	TL	10.5	-	914	347	31	417	2746	-	-	4.50
					36.0	13.7	39	16.4	108.1			65

### FEATURES

- Wide, deep lug design
- Stepped tread design
- Reinforced sidewall
- Rim protector

### BENEFITS

- Provides enhanced durability and traction in off-road conditions
- Provides enhanced cleanout for improved traction
- Provides improved side impact resistance
- Protects wheel from impact damage

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



STATIC	CREEP	MAXIMUM TIRE LOAD [kg] [lb]									
		5 km/h 3 mph	10 km/h 5 mph	15 km/h 10 mph	20 km/h 12.5 mph	25 km/h 15 mph	30 km/h 20 mph	35 km/h 22 mph	40 km/h 25 mph	45 km/h 28 mph	50 km/h 30 mph
1045	-	-	660	520	500	-	450	-	435	-	415
2290	-	-	1450	1145	1100	-	985	-	955	-	915
1295	-	-	820	650	625	-	560	-	540	-	515
2860	-	-	1810	1430	1375	-	1230	-	1195	-	1140
2450	-	-	1550	1225	1180	-	1055	-	1025	-	975
5575	-	-	3530	2790	2685	-	2400	-	2330	-	2225
-	-	-	3540	-	-	2725	-	-	2425	-	2290
-	-	-	7805	-	-	6010	-	-	5345	-	5050
2275	-	-	1440	1140	1095	-	980	-	950	-	905
5025	-	-	3180	2510	2415	-	2160	-	2100	-	2005
1880	1420	-	1120	935	895	845	795	780	755	725	710
4160	3140	-	2480	2070	1980	1870	1760	1725	1665	1600	1570
3315	2500	-	1975	1650	1575	1490	1400	1375	1325	1275	1250
7315	5520	-	4360	3645	3480	3285	3090	3035	2925	2815	2760
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
2970	-	-	1880	1485	1430	-	1280	-	1240	-	1185
6540	-	-	4140	3270	3145	-	2815	-	2730	-	2610
3375	-	-	2135	1685	1625	-	1450	-	1410	-	1345
7440	-	-	4710	3720	3580	-	3205	-	3110	-	2965
3755	-	-	2375	1875	1805	-	1615	-	1570	-	1495
8280	-	-	5240	4140	3980	-	3565	-	3460	-	3300
4015	-	-	2540	2005	1930	-	1725	-	1675	-	1600
8850	-	-	5600	4425	4255	-	3810	-	3695	-	3530
4525	-	-	2865	2265	2175	-	1950	-	1890	-	1805
9985	-	-	6320	4995	4805	-	4300	-	4170	-	3980
5420	-	-	3430	2710	2605	-	2330	-	2265	-	2160
11945	-	-	7560	5970	5745	-	5140	-	4990	-	4765



# CAMSO HAULER SKZ

## VERSATILITE DURABILITY ON MIXED SURFACES

TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE [bar] [psi]
			RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.			
31 x 15.50-15 NHS	8	TL	13LB	-	782	384	24	-	-	116	B	3.10
					30.8	15.1	30	-	-			45
10-16.5 NHS	10	TL	8.25	-	785	273	31	364	2335	-	-	5.20
					30.9	10.7	39	14.3	91.9			75
12-16.5 NHS	10	TL	9.75	-	834	320	34	381	2515	-	-	4.50
					32.8	12.6	43	15.0	99.0			65
12-16.5 NHS	12	TL	9.75	-	834	324	34	384	2483	-	-	5.50
					32.8	12.8	43	15.1	97.8			80
33 x 15.50-16.5 NHS	14	TL	12	-	836	380	35	384	2446	-	-	4.85
					32.9	15.0	44	15.1	96.3			70
14-17.5 NHS	14	TL	10.5	-	930	351	44	426	2733	-	-	5.50
					36.6	13.8	55	16.8	107.6			80

### FEATURES

- Non-directional extra deep tread
- Large footprint with massive lug-to-void ratio
- Versatile tread pattern
- Wide sidewall

### BENEFITS

- Improves tread life and resistance to punctures
- Provides excellent durability and even tread wearing
- Optimizes traction and handling on mixed and hard surfaces
- Provides superior side impact resistance

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



STATIC	CREEP	MAXIMUM TIRE LOAD [kg] [lb]								
		10 km/h 5 mph	15 km/h 10 mph	20 km/h 12.5 mph	25 km/h 15 mph	30 km/h 20 mph	35 km/h 22 mph	40 km/h 25 mph	45 km/h 28 mph	50 km/h 30 mph
3315	2500	1975	1650	1575	1490	1400	1375	1325	1275	1250
7315	5520	4360	3645	3480	3285	3090	3035	2925	2815	2760
3375	-	2135	1685	1625	-	1450	-	1410	-	1345
7440	-	4710	3720	3580	-	3205	-	3110	-	2965
4015	-	2540	2005	1930	-	1725	-	1675	-	1600
8850	-	5600	4425	4255	-	3810	-	3695	-	3530
4525	-	2865	2265	2175	-	1950	-	1890	-	1805
9985	-	6320	4995	4805	-	4300	-	4170	-	3980
5370	-	3400	2685	2585	-	2310	-	2245	-	2140
11840	-	7495	5920	5700	-	5095	-	4950	-	4720
6125	-	3875	3060	2945	-	2635	-	2560	-	2440
13495	-	8540	6745	6490	-	5805	-	5635	-	5380







# CAMSO SKS 792S

Formerly Solideal SolidAir SKS

## FLAT-PROOF DURABILITY MEETS OFF-ROAD TRACTION

### FEATURES

- FEA-validated aperture design
- Stepped tread design
- Reusable wheel

### BENEFITS

- Improves ride quality and reduces cracking
- Provides excellent cleanout for improved off-road traction
- Provides lower cost per hour and quicker installation

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



TIRE SIZE	HEEL WIDTH	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] [inches]					HEEL		LOAD CAPACITY [kg] [lb]					
										OTHER VEHICLES			STATIC	COUNTERBALANCED LIFT TRUCKS	
			O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.	NORMAL	QUICK	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph	25 km/h 16 mph	25 km/h 16 mph
31 x 10-20	7.50	7.50	781	237	33	372	2522	-	■	4030	3660	3100	4680	4030	3100
			30.7	9.3	42	14.6	99.3	-	■	8900	8100	6850	10350	8885	6835
33 x 12-20	7.50	7.50	831	287	40	388	2669	-	■	5200	4720	4000	6040	5200	4000
			32.7	11.3	50	15.3	105.1	-	■	11500	10400	8850	13350	11465	8820
36 x 14-20	7.50	7.50	910	320	43	426	2860	-	■	6175	5605	4750	7175	6175	4750
			35.8	12.6	54	16.8	112.6	-	■	13650	12350	10500	15850	13650	10500



# CAMSO SKS 782S

Formerly Solideal Safetymaster SKS

## SOLID OFF-ROAD TRACTION

### FEATURES

- Full solid construction
- Stepped tread design
- Reusable wheel

### BENEFITS

- Provides excellent durability and flat-free operation
- Provides excellent cleanout for improved off-road traction
- Provides lower cost per hour and quicker installation

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



TIRE SIZE	HEEL WIDTH	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] [inches]					HEEL		LOAD CAPACITY [kg] [lb]					
										OTHER VEHICLES			STATIC	COUNTERBALANCED LIFT TRUCKS	
			O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.	NORMAL	QUICK	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph	25 km/h 16 mph	25 km/h 16 mph
6.50-16	5.50	5.50	743	166	15	341	2344	■	■	2600	2360	2000	3020	2600	2000
			29.3	6.5	18.9	13.4	92.3	■	■	5750	5200	4400	6650	5750	4400
7.50-16	5.50	5.50	793	207	19	371	2392	■	■	3965	3600	3050	4605	3965	3050
			31.2	8.1	23.9	14.6	94.2	■	■	8750	7950	6750	10150	8750	6750
8.00-16	5.50	5.50	818	208	14	379	2570	■	■	4160	3775	3200	4830	4160	3200
			32.2	8.2	17.6	14.9	101.2	■	■	9200	8350	7050	10650	9200	7050
8.00-16	6.00	6.00	818	208	14	379	2570	■	-	4160	3775	3200	4830	4160	3200
			32.2	8.2	17.6	14.9	101.2	■	-	9200	8350	7050	10650	9200	7050
31 x 10-20	7.50	7.50	781	237	33	372	2522	-	■	4030	3660	3100	4680	4030	3100
			30.7	9.3	42	14.6	99.3	-	■	8900	8100	6850	10350	8885	6835
33 x 12-20	7.50	7.50	831	287	40	396	2677	-	■	5200	4720	4000	6040	5200	4000
			32.7	11.3	50	15.6	105.4	-	■	11500	10400	8850	13350	11465	8820
36 x 14-20	7.50	7.50	910	320	43	426	2860	-	■	6175	5605	4750	7175	6175	4750
			35.8	12.6	54	16.8	112.6	-	■	13650	12350	10500	15850	13650	10500



# CAMSO SKS 793S

## SEVERE-DUTY AND FLAT-FREE

### FEATURES

- Innovative non-directional tread pattern
- New elongated aperture design
- Massive tread depth
- Reusable wheel

### BENEFITS

- Provides greater durability and versatility for mixed and hard surface applications
- Provides excellent ride quality and reduces cracking
- Improves durability for longer service life
- Provides lower cost per hour and quicker installation

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



TIRE SIZE	HEEL WIDTH	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] [inches]					HEEL		LOAD CAPACITY [kg] [lb]					
										OTHER VEHICLES			STATIC	COUNTERBALANCED LIFT TRUCKS	
			O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.	NORMAL	QUICK	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph	25 km/h 16 mph	25 km/h 16 mph
31 x 10-20	7.50	7.50	780	233	39	372	2451	-	■	4030	3660	3100	4680	4030	3100
			30.7	9.2	49	14.6	96.5			8900	8100	6850	10350	8885	6835
33 x 12-20	7.50	7.50	830	285	39	391	2503	-	■	5200	4720	4000	6040	5200	4000
			32.7	11.2	50	15.4	98.5			11500	10400	8850	13350	11465	8820
36 x 14-20	7.50	7.50	910	322	52	424	2858	-	■	6175	5605	4750	7175	6175	4750
			35.8	12.7	66	16.7	112.5			13650	12350	10500	15850	13650	10500



# CAMSO SKS 796S

Formerly Solideal SolidAir SM

## HARD SURFACE SOLID TIRE SOLUTION

### FEATURES

- FEA-validated aperture design
- Full-width footprint
- Reusable wheel

### BENEFITS

- Improves ride quality and reduces cracking
- Provides excellent stability and tread life
- Provides lower cost per hour and quicker installation

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



TIRE SIZE	HEEL WIDTH	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] [inches]					HEEL		LOAD CAPACITY [kg] [lb]					
										OTHER VEHICLES			STATIC	COUNTERBALANCED LIFT TRUCKS	
			O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.	NORMAL	QUICK	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph	25 km/h 16 mph	25 km/h 16 mph
31 x 10-20	7.50	7.50	781	237	-	372	2522	-	■	4030	3660	3100	4680	4030	3100
			30.7	9.3	-	14.6	99.3			8900	8100	6850	10350	8885	6835
33 x 12-20	7.50	7.50	831	287	-	388	2669	-	■	5200	4720	4000	6040	5200	4000
			32.7	11.3	-	15.3	105.1			11500	10400	8850	13350	11465	8820
36 x 14-20	7.50	7.50	909	326	-	425	2873	-	■	6175	5605	4750	7175	6175	4750
			35.8	12.8	-	16.7	113.1			13650	12350	10500	15850	13650	10500

# CAMSO SKS 786S

Formerly Solideal Safetymaster SM

## SOLID HARD SURFACE DURABILITY

### FEATURES

- Full solid construction
- Full-width footprint
- Reusable wheel

### BENEFITS

- Provides excellent durability and flat-free operation
- Provides excellent stability and tread life
- Provides lower cost per hour and quicker installation

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



TIRE SIZE	HEEL WIDTH	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] [Inches]					HEEL		LOAD CAPACITY [kg] [lb]					
			O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.	NORMAL	QUICK	OTHER VEHICLES			STATIC	COUNTERBALANCED LIFT TRUCKS	
										6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph	LOAD WHEEL 25 km/h 16 mph	STEERING WHEEL 25 km/h 16 mph
6.50-16	7.50	7.50	743	169	-	350	2334	■	-	2600	2360	2000	3020	2600	2000
			29.3	6.7	-	13.8	91.9			5750	5200	4400	6650	5750	4400
31 x 10-20	7.50	7.50	781	237	-	372	2522	-	■	4030	3660	3100	4680	4030	3100
			30.7	9.3	-	14.6	99.3			8900	8100	6850	10350	8885	6835
33 x 12-20	7.50	7.50	831	287	-	396	2677	-	■	5200	4720	4000	6040	5200	4000
			32.7	11.3	-	15.6	105.4			11500	10400	8850	13350	11465	8820
36 x 14-20	7.50	7.50	909	326	-	429	2905	-	■	6175	5605	4750	7175	6175	4750
			35.8	12.8	-	16.9	114.4			13650	12350	10500	15850	13650	10500







# CAMSO SL R4 (cont.)

## HEAVY-DUTY DURABILITY AND TRACTION

TIRE SIZE	ALT. SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	SERVICE	APPLICATION
				RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.				
18.4-26 IND	480/80-26	12	TL	DW16L	DW15L TW15L TW16L	1430	495	28	635	4270	156	A8	IND. TRACTOR	CYCLIC
						56.3	19.5	35	25.0	168.1				CONSTANT
						1430	495	28	635	4270				
						56.3	19.5	35	25.0	168.1				
16.9-28 IND	440/80-28	12	TL	DW15L	DW14L TW14L TW15L	1415	441	33	-	-	152	A8	IND. TRACTOR	CYCLIC
						55.7	17.4	42	-	-				CONSTANT
						1415	441	33	-	-				
						55.7	17.4	42	-	-				
18.4-28 IND	-	12	TL	DW16L	DW15L TW15L TW16L	1489	494	39	681	4414	157	A8	IND. TRACTOR	CYCLIC
						58.6	19.4	49	26.8	173.8				CONSTANT
						1489	494	39	681	4414				
						58.6	19.4	49	26.8	173.8				
420/80-30 IND	16.9-30	-	TL	DW15L	DW14L TW14L TW15L	1452	446	30	674	4354	155	A8	IND. TRACTOR	CYCLIC
						57.2	17.6	38	26.5	171.4				CONSTANT
						1452	446	30	674	4354				
						57.2	17.6	38	26.5	171.4				

### FEATURES

- Heavy-duty carcass
- Optimized lug-to-void ratio with extra-deep tread
- Stepped tread design

### BENEFITS

- Improves stability and side impact resistance
- Increases tread life and off-road traction
- Improves self-cleaning and stone ejection for excellent traction

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]										
	STATIC	5 km/h* 3 mph	10 km/h** 6 mph	15 km/h 9 mph	20 km/h 12 mph	25 km/h 15 mph	30 km/h 18 mph	35 km/h 21 mph	40 km/h 24 mph	45 km/h 28 mph	50 km/h 31 mph
2.50	9200	6680	6000	5360	4920	4440	4280	4120	4000	3840	3640
36	20280	14725	13230	11815	10845	9790	9435	9085	8820	8465	8025
2.50	9200	5800	5000	4520	4360	4240	4160	4080	4000	3840	3640
36	20280	12785	11025	9965	9610	9345	9170	8995	8820	8465	8025
2.60	8165	5930	5325	4755	4365	3940	3800	3655	3550	3410	3230
38	18000	13075	11740	10485	9625	8685	8375	8060	7825	7520	7120
2.60	8165	5150	4440	4010	3870	3765	3690	3620	3550	3410	3230
38	18000	11355	9790	8840	8530	8300	8135	7980	7825	7520	7120
2.50	9490	6890	6190	5530	5075	4580	4415	4250	4125	3960	3755
36	20920	15190	13645	12190	11190	10095	9735	9370	9095	8730	8280
2.50	9490	5980	5155	4660	4495	4375	4290	4210	4125	3960	3755
36	20920	13185	11365	10275	9910	9645	9460	9280	9095	8730	8280
3.2	8915	6470	5815	5195	4765	4300	4145	3990	3875	3720	3525
46	19655	14265	12820	11455	10505	9480	9140	8795	8545	8200	7770
3.20	8915	5620	4845	4380	4225	4110	4030	3955	3875	3720	3525
46	19655	12390	10680	9655	9315	9060	8885	8720	8545	8200	7770





# CAMSO BHL 753

Formerly Solideal BHZ

## DURABILITY MEETS RIDE QUALITY

TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	SERVICE	APPLICATION
			RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.				
12-16.5 NHS	12	TL	9.75	-	828	324	18	379	2506	-	-	CON. EQUIP	-
					32.6	12.8	23	14.9	98.7				
12.5/80-18 IMP	12	TL	W9	11	996	319	23	465	2926	142	A8	WITHOUT HLV	FREE ROLLING
					39.2	12.6	29	18.3	1115.2				
					996	319	23	465	2926	129	A8	WITHOUT HLV	DRIVE
					39.2	12.6	29	18.3	1115.2				
19.5L-24 IND (500/70-24)	12	TL	DW16L	TW16L	1308	502	25	594	3896	151	A8	IND. TRACTOR	CYCLIC
					51.5	19.8	31	23.4	153.4				
					1308	502	25	594	3896	151	A8	IND. TRACTOR	CONSTANT
					51.5	19.8	31	23.4	153.4				
18.4-26 IND (480/80-26)	12	TL	DW16L	DW15L TW15L TW16L	1427	499	25	-	-	156	A8	IND. TRACTOR	CYCLIC
					56.2	19.6	31	-	-				
					1427	499	25	-	-	156	A8	IND. TRACTOR	CONSTANT
					56.2	19.6	31	-	-				
16.9-28 IND (440/80-28)	12	TL	DW15L	DW14L TW14L TW15L	1399	456	28	-	-	152	A8	IND. TRACTOR	CYCLIC
					55.1	18.0	35	-	-				
					1399	456	28	-	-	152	A8	IND. TRACTOR	CONSTANT
					55.1	18.0	35	-	-				

HLV: vehicles used on round trips (e.g. from field to farm) where on one way the vehicle is empty and on the other way the gross vehicle mass exceeds two times the mass of the empty vehicle, inclusive of the driver, if any: max 1km.

### FEATURES

- Non-directional tread pattern with high lug-to-void ratio
- Optimized continuous-contact tread pattern
- Non-directional tread pattern with high lug-to-void ratio
- Tapered tread lugs

### BENEFITS

- Ensures even tread wearing for greater durability
- Significantly reduces vibration for improved ride quality
- Protects against tread impacts and punctures
- Improves lug stability for even wearing

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]										
	STATIC	5 km/h* 3 mph	10 km/h 5 mph	15 km/h 10 mph	20 km/h 12.5 mph	25 km/h 15 mph	30 km/h 20 mph	35 km/h 22 mph	40 km/h 25 mph	45 km/h 28 mph	50 km/h 30 mph
5.50	4525	-	2865	2265	2175	-	1950	-	1890	-	1805
80	9985	-	6320	4995	4805	-	4300	-	4170	-	3980
3.70	4375	-	3710	3525	3340	3155	2970	2785	2650	2520	2385
54	9635	-	8175	7765	7360	6950	6540	6130	5840	5550	5255
3.70	4350	-	2590	2460	2330	2200	2070	1945	1850	1760	1665
54	9590	-	5710	5425	5140	4855	4570	4285	4080	3875	3670
2.30	7935	5760	5175	4625	4245	3830	3690	3555	3450	3310	3140
33	17495	12700	11410	10195	9360	8445	8135	7835	7605	7295	6920
2.30	7935	5005	4315	3900	3760	3655	3590	3520	3450	3310	3140
33	17495	11035	9515	8600	8290	8060	7915	7760	7605	7295	6920
2.50	9200	6680	6000	5360	4920	4440	4280	4120	4000	3840	3640
36	20280	14725	13230	11815	10845	9790	9435	9085	8820	8465	8025
2.50	9200	5800	5000	4520	4360	4240	4160	4080	4000	3840	3640
36	20280	12785	11025	9965	9610	9345	9170	8995	8820	8465	8025
2.60	8165	5930	5325	4755	4365	3940	3800	3655	3550	3410	3230
38	18000	13075	11740	10485	9625	8685	8375	8060	7825	7520	7120
2.60	8165	5150	4440	4010	3870	3765	3690	3620	3550	3410	3230
38	18000	11355	9790	8840	8530	8300	8135	7980	7825	7520	7120

\*Cyclic: One way distance up to 150 m (500 feet)





# CAMSO BHL 530

Formerly Solideal MR F3

## PERFORMANCE AND QUALITY YOU CAN RELY ON

### FEATURES

- Engineered F3 rib tread design
- Robust carcass
- Deep tread depth

### BENEFITS

- Provides smooth ride and effective steering
- Reduces tread crowning for even wearing and excellent stability
- Enhances longevity

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



#	TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [Inches]					LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]		
				RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.				STATIC	15 km/h 9 mph	50 km/h 31 mph
A	11L-15SLIMP	12	TL	8LB	10LB	*	*	*	*	*	121	B	3.60	2900	1670	1450
						*	*	*	*	*			52	6395	3680	3195
B	11L-16SLIMP	12	TL	-	-	*	*	*	*	*	123	B	3.60	3100	1785	1550
						*	*	*	*	*			52	6835	3935	3415
C	14L-16.1SLIMP	14	TL	W11Cx16.1	-	*	*	*	*	*	138	B	3.60	4720	2715	2360
						*	*	*	*	*			52	10405	5985	5205





# CAMSO TLH 732

## ULTIMATE OFF-ROAD TRACTION AND STABILITY

TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	TREAD CODE	SERVICE
			RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.				
13.00-24	12	TL / TT	10.00VA (SDC)	8.00TG 9.00/1.5 (DC)	1294	372	23	576	3890	168	A2	L-2	LOADER-DOZER
					50.9	14.6	29	22.7	153.1				
					1294	372	23	576	3890	146	B	E-2	EARTHMOVER
					50.9	14.6	29	22.7	153.1				
13.00-24	12	TL / TT	8.00TG	9.00/1.5 (DC) 10.00VA (SDC)	1276	343	23	590	3848	143	A8	G-2	GRADER
					50.2	13.5	29	23.2	151.5				
13.00-24	16	TL / TT	10.00	9.0 9.00/1.5 (DC)	1290	375	24	589	3912	173	A2	L-2	LOADER-DOZER
					50.8	14.8	30	23.2	154.0				
					1290	375	24	589	3912	152	A8	G-2	EARTHMOVER
					50.8	14.8	30	23.2	154.0				
					1290	375	24	589	3912	153	A8	G-2	GRADER
					50.8	14.8	30	23.2	154.0				
14.00-24	12	TL / TT	8.00TG	10.00VA (SDC) 10.00WA (SDC)	1347	363	25	615	4062	147	A8	G-2	GRADER
					53.0	14.3	31	24.2	159.9				
14.00-24	12	TL / TT	10.00VA (SDC)	8.00TG 9.00/1.5 (DC) 10.00WA (SDC)	1364	393	25	598	4104	172	A2	L-2	LOADER-DOZER
					53.7	15.5	31	23.5	161.6				
					1364	393	25	598	4104	150	B	E-2	EARTHMOVER
					53.7	15.5	31	23.5	161.6				
14.00-24	16	TL / TT	8.00TG	10.00VA (SDC) 9.00/1.5 (DC)	1355	398	25	616	4077	153	A8	G-2	GRADER
					53.3	15.7	31	24.3	160.5				
14.00-24	16	TL / TT	10.00W	10.0 9.0 9.00/1.5 (DC)	1355	398	25	616	4077	177	A2	L-2	LOADER-DOZER
					53.3	15.7	31	24.3	160.5				
					1355	398	25	616	4077	156	B	E-2	EARTHMOVER
					53.3	15.7	31	24.3	160.5				

### FEATURES

- Massive tread depth with curved tread lugs
- New wraparound stepped tread design
- Void guard impact protection
- New impact guard sidewall design

### BENEFITS

- Ensures great durability and extra traction
- Maximizes tread cleanout for best off-road traction
- Protects from punctures to minimize flat tires
- Deflects debris to better protect sidewalls and reduce stress cracking

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]															
	STATIC	CREEP	5 km/h 3 mph	10 km/h 6 mph	15 km/h 9 mph	20 km/h 12 mph	25 km/h 15 mph	30 km/h 18 mph	35 km/h 21 mph	40 km/h 24 mph	45 km/h 28 mph	50 km/h 31 mph	55 km/h 34 mph	60 km/h 37 mph	65 km/h 40 mph	
4.50	8950	7300	6400	5600	4875	4700	4475	4300	4150	3925	3750	3525	-	-	-	
65	19730	16095	14110	12345	10750	10360	9865	9480	9150	8655	8265	7770	-	-	-	
3.00	-	-	-	-	3350	3300	3250	3175	3125	3100	3050	3000	2900	2750	2500	
44	-	-	-	-	7385	7275	7165	7000	6890	6835	6725	6615	6395	6065	5510	
3.00	-	-	-	-	-	-	-	-	-	2725	-	2475	-	2225	2000	
44	-	-	-	-	-	-	-	-	-	6010	-	5455	-	4905	4410	
6.00	10400	8450	7400	6500	5650	5450	5200	5000	4800	4550	4350	4100	-	-	-	
87	22930	18630	16315	14330	12455	12015	11465	11025	10580	10030	9590	9040	-	-	-	
4.00	-	-	-	-	4000	3925	3850	3800	3725	3675	3650	3575	3475	3300	2975	
58	-	-	-	-	8820	8655	8490	8380	8210	8100	8045	7880	7660	7275	6560	
4.00	-	-	-	-	-	-	-	-	-	3650	-	3325	-	3000	2675	
58	-	-	-	-	-	-	-	-	-	8045	-	7330	-	6615	5895	
2.75	10080	-	-	-	-	-	-	-	-	3075	-	2800	-	2525	2250	
40	22225	-	-	-	-	-	-	-	-	6780	-	6175	-	5565	4960	
4.25	10100	8200	7200	6300	5500	5300	5050	4850	4650	4400	4225	3975	-	-	-	
62	22265	18080	15875	13890	12125	11685	11135	10690	10250	9700	9315	8765	-	-	-	
2.75	-	-	-	-	3750	3675	3625	3550	3475	3450	3425	3350	3250	3075	2775	
40	-	-	-	-	8265	8100	7990	7825	7660	7605	7550	7385	7165	6780	6120	
3.75	11680	-	-	-	-	-	-	-	-	3650	-	3325	-	3000	2675	
54	25750	-	-	-	-	-	-	-	-	8045	-	7330	-	6615	5895	
5.50	11700	9500	8300	7300	6350	6150	5850	5600	5400	5100	4900	4600	-	-	-	
80	25795	20945	18300	16095	14000	13560	12895	12345	11905	11245	10805	10140	-	-	-	
3.75	-	-	-	-	4475	4400	4325	4250	4150	4125	4075	4000	3875	3675	3325	
54	-	-	-	-	9865	9700	9535	9370	9150	9095	8985	8820	8545	8100	7330	



# CAMSO TLH 532

Formerly Solideal TH2

## HIGH QUALITY FOR STANDARD DUTY

### FEATURES

- Deep tread pattern
- Optimized tread pattern
- Flatter tread profile

### BENEFITS

- Enhances durability and traction
- Provides good traction in off-road conditions
- Resists tread crowning for even wearing

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



#	TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	TREAD CODE	SERVICE
				RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.				
A	13.00-24 TG	12	TL/TT	8.00TG	9.00/1.5 (DC) 10.00VA (SDC)	1249	349	21	-	-	143	A8	G-2	GRADER
						49.2	13.7	26	-	-				
B	13.00-24 TG	12	TL/TT	10.00VA (SDC)	8.00TG, 9.00/1.5 (DC)	1263	354	21	559	3797	168	A2	L-2	LOADER-DOZER
						49.7	13.9	26	22.0	149.5				
C	14.00-24 TG	12	TL/TT	8.00TG	10.00VA 9.00DC	1324	384	22	569	3982	172	A2	L-2	LOADER-DOZER
						52.1	15.1	28	22.4	156.8				
						1324	384	22	569	3982	147	A8	G-2	GRADER
						52.1	15.1	28	22.4	156.8				

#	INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]														
		STATIC	CREEP	5 km/h 3 mph	10 km/h 6 mph	15 km/h 9 mph	20 km/h 12 mph	25 km/h 15 mph	30 km/h 18 mph	35 km/h 21 mph	40 km/h 24 mph	45 km/h 28 mph	50 km/h 31 mph	55 km/h 34 mph	60 km/h 37 mph	65 km/h 40 mph
A	3.00	-	-	-	-	-	-	-	-	-	2725	-	2475	-	2225	2000
	44	-	-	-	-	-	-	-	-	-	6010	-	5455	-	4905	4410
B	4.50	8950	7300	6400	5600	4875	4700	4475	4300	4150	3925	3750	3525	-	-	-
	65	19730	16095	14110	12345	10750	10360	9865	9480	9150	8655	8265	7770	-	-	-
C	4.25	10100	8200	7200	6300	5500	5300	5050	4850	4650	4400	4225	3975	-	-	-
	62	22265	18080	15875	13890	12125	11685	11135	10690	10250	9700	9315	8765	-	-	-
C	2.75	10080	-	-	6300	-	-	-	-	-	3075	-	2800	-	2525	2250
	40	22225	-	-	13890	-	-	-	-	-	6780	-	6175	-	5565	4960







# CAMSO SL G2

## HEAVY-DUTY OFF-ROAD DURABILITY AND TRACTION

TIRE SIZE	PR	TL / TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	TREAD CODE	SERVICE
			RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.				
13.00-24 TG	12	TL / TT	8.00TG	9.00/1.5 (DC) 10.00VA (SDC)	1281	360	29	595	3823	143	A8	G-2	GRADER
					50.4	14.2	37	23.4	150.5				
13.00-24 TG	12	TL / TT	10.00VA (SDC)	8.00TG 9.00/1.5 (DC)	1281	360	29	595	3823	168	A8	L-2	LOADER-DOZER
					50.4	14.2	37	23.4	150.5				
					1281	360	29	595	3823	146	B	E-2	EARTHMOVER
					50.4	14.2	37	23.4	150.5				
13.00-24 TG	16	TL / TT	10.00VA	-	1298	366	29	596	3823	173	A2	L-2	LOADER-DOZER
					51.1	14.4	37	23.5	153.1				
					1298	366	29	596	3823	152	A8	E-2	EARTHMOVER
					51.1	14.4	37	23.5	153.1				
					1298	366	29	596	3823	153	A8	G-2	GRADER
					51.1	14.4	37	23.5	153.1				
14.00-24 TG	12	TL / TT	8.00TG	10.00VA 9.00DC	1335	388	32	592	3984	172	A2	L-2	LOADER-DOZER
					52.6	15.3	40	23.3	156.9				
					1335	388	32	592	3984	150	B	E-2	EARTHMOVER
					52.6	15.3	40	23.3	156.9				
					1335	388	32	592	3984	147	A8	G-2	GRADER
					52.6	15.3	40	23.3	156.9				
14.00-24 TG	16	TL / TT	10.00VA	-	1326	368	32	618	3957	177	A2	L-2	LOADER-DOZER
					52.2	14.5	40	24.3	155.8				
					1326	368	32	618	3957	156	B	E-2	EARTHMOVER
					52.2	14.5	40	24.3	155.8				
					1326	368	32	618	3957	153	A8	G-2	GRADER
					52.2	14.5	40	24.3	155.8				

### FEATURES

- Extra-deep tread pattern
- Stepped tread design
- Heavy-duty sidewall construction
- Flatter tread profile

### BENEFITS

- Provides best durability and traction in off-road conditions
- Provides excellent cleanout for improved traction
- Provides superior side impact resistance and stability
- Resists tread crowning for even wearing

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]															
	STATIC	CREEP	5 km/h 3 mph	10 km/h 6 mph	15 km/h 9 mph	20 km/h 12 mph	25 km/h 15 mph	30 km/h 18 mph	35 km/h 21 mph	40 km/h 24 mph	45 km/h 28 mph	50 km/h 31 mph	55 km/h 34 mph	60 km/h 37 mph	65 km/h 40 mph	
3.00	-	-	-	-	-	-	-	-	-	2725	-	2475	-	2225	2000	
44	-	-	-	-	-	-	-	-	-	6010	-	5455	-	4905	4410	
4.50	8950	7300	6400	5600	4875	4700	4475	4300	4150	3925	3750	3525	-	-	-	
65	19730	16095	14110	12345	10750	10360	9865	9480	9150	8655	8265	7770	-	-	-	
3.00	-	-	-	-	3350	3300	3250	3175	3125	3100	3050	3000	2900	2750	2500	
44	-	-	-	-	7385	7275	7165	7000	6890	6835	6725	6615	6395	6065	5510	
6.00	10400	8450	7400	6500	5650	5450	5200	5000	4800	4550	4350	4100	-	-	-	
87	22930	18630	16315	14330	12455	12015	11465	11025	10580	10030	9590	9040	-	-	-	
4.00	-	-	-	-	4000	3925	3850	3800	3725	3675	3650	3575	3475	3300	2975	
58	-	-	-	-	8820	8655	8490	8380	8210	8100	8045	7880	7660	7275	6560	
4.00	-	-	-	-	-	-	-	-	-	3650	-	3325	-	3000	2675	
58	-	-	-	-	-	-	-	-	-	8045	-	7330	-	6615	5895	
4.25	10100	8200	7200	6300	5500	5300	5050	4850	4650	4400	4225	3975	-	-	-	
62	22265	18080	15875	13890	12125	11685	11135	10690	10250	9700	9315	8765	-	-	-	
2.75	-	-	-	-	3750	3675	3625	3550	3475	3450	3425	3350	3250	3075	2775	
40	-	-	-	-	8265	8100	7990	7825	7660	7605	7550	7385	7165	6780	6120	
2.75	10080	-	-	6300	-	-	-	-	-	3075	-	2800	-	2525	2250	
40	22225	-	-	13890	-	-	-	-	-	6780	-	6175	-	5565	4960	
5.50	11700	9500	8300	7300	6350	6150	5850	5600	5400	5100	4900	4600	-	-	-	
80	25795	20945	18300	16095	14000	13560	12895	12345	11905	11245	10805	10140	-	-	-	
3.75	-	-	-	-	4475	4400	4325	4250	4150	4125	4075	4000	3875	3675	3325	
54	-	-	-	-	9865	9700	9535	9370	9150	9095	8985	8820	8545	8100	7330	
3.75	11680	-	-	7300	-	-	-	-	-	3650	-	3325	-	3000	2675	
54	25750	-	-	16095	-	-	-	-	-	8045	-	7330	-	6615	5895	



# CAMSO SL G3

## MULTI-SURFACE STABILITY AND PERFORMANCE

TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	TREAD CODE	SERVICE
			RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.				
13.00-24 TG	12	TL/TT	8.00TG	9.00/1.5 (DC) 10.00VA (SDC)	1303	367	28	576	3832	143	A8	G-3	GRADER
					51.3	14.4	35	22.7	150.9				
13.00-24 TG	12	TL/TT	10.00VA (SDC)	8.00TG 9.00/1.5 (DC)	1303	367	28	576	3832	168	A2	L-3	LOADER-DOZER
					51.3	14.4	35	22.7	150.9				
					1303	367	28	576	3832	146	B	E-3	EARTHMOVER
					51.3	14.4	35	22.7	150.9				
14.00-24 TG	12	TL/TT	8.00TG	10.00VA 9.00DC	1354	385	27	592	3998	172	A2	L-3	LOADER-DOZER
					53.3	15.2	34	23.3	157.4				
					1354	385	27	592	3998	150	B	E-3	EARTHMOVER
					53.3	15.2	34	23.3	157.4				
					1354	385	27	592	3998	147	A8	G-3	GRADER
					53.3	15.2	34	23.3	157.4				
14.00-24 TG	16	TL/TT	10.00VA	-	1338	393	27	622	3993	177	A2	L-3	LOADER-DOZER
					52.7	15.5	34	24.5	157.2				
					1338	393	27	622	3993	156	B	E-3	EARTHMOVER
					52.7	15.5	34	24.5	157.2				
					1338	393	27	622	3993	153	A8	G-3	GRADER
					52.7	15.5	34	24.5	157.2				

### FEATURES

- Extra-deep non-directional tread pattern
- Optimized lug-to-void ratio
- Heavy-duty sidewall construction
- Flatter tread profile

### BENEFITS

- Optimizes durability and traction on mixed and hard surfaces
- Provides excellent traction for mixed and hard surface applications
- Provides superior side impact resistance and stability
- Resists tread crowning for even wearing

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]														
	STATIC	5 km/h 3 mph	10 km/h 6 mph	15 km/h 9 mph	20 km/h 12 mph	25 km/h 15 mph	30 km/h 18 mph	35 km/h 21 mph	40 km/h 24 mph	45 km/h 28 mph	50 km/h 31 mph	55 km/h 34 mph	60 km/h 37 mph	65 km/h 40 mph	
3.00	-	-	-	-	-	-	-	-	2725	-	2475	-	2225	2000	
44	-	-	-	-	-	-	-	-	6010	-	5455	-	4905	4410	
4.50	8950	6400	5600	4875	4700	4475	4300	4150	3925	3750	3525	-	-	-	
65	19730	14110	12345	10750	10360	9865	9480	9150	8655	8265	7770	-	-	-	
3.00	-	-	-	3350	3300	3250	3175	3125	3100	3050	3000	2900	2750	2500	
44	-	-	-	7385	7275	7165	7000	6890	6835	6725	6615	6395	6065	5510	
4.25	10100	7200	6300	5500	5300	5050	4850	4650	4400	4225	3975	-	-	-	
62	22265	15875	13890	12125	11685	11135	10690	10250	9700	9315	8765	-	-	-	
2.75	-	-	-	3750	3675	3625	3550	3475	3450	3425	3350	3250	3075	2775	
40	-	-	-	8265	8100	7990	7825	7660	7605	7550	7385	7165	6780	6120	
2.75	10080	-	6300	-	-	-	-	-	3075	-	2800	-	2525	2250	
40	22225	-	13890	-	-	-	-	-	6780	-	6175	-	5565	4960	
5.50	11700	8300	7300	6350	6150	5850	5600	5400	5100	4900	4600	-	-	-	
80	25795	18300	16095	14000	13560	12895	12345	11905	11245	10805	10140	-	-	-	
3.75	-	-	-	4475	4400	4325	4250	4150	4125	4075	4000	3875	3675	3325	
54	-	-	-	9865	9700	9535	9370	9150	9095	8985	8820	8545	8100	7330	
3.75	11680	-	7300	-	-	-	-	-	3650	-	3325	-	3000	2675	
54	25750	-	16095	-	-	-	-	-	8045	-	7330	-	6615	5895	



# CAMSO TLH 792S

Formerly Solideal SolidAir TLH

## EXTREME-DUTY FLAT-FREE TIRE SOLUTION

### FEATURES

- Engineered solid tire solution
- Patented triangular aperture design
- Massive tread depth
- Stepped tread design

### BENEFITS

- Provides flat-free operation and ultimate durability
- Optimizes stability, strength and comfort
- Improves durability and traction
- Provides excellent cleanout for improved traction

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



TIRE SIZE	HEEL WIDTH	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] [inches]					HEEL		LOAD CAPACITY [kg] [lb]			
			O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.	NORMAL	QUICK	OTHER VEHICLES			STATIC
										6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
13.00-24	8.50	8.50V	1290	330	70	595	4027	-	■	7650	6950	6375	9625
			50.8	13.0	88	23.4	158.5	-	■	16900	15350	14050	21250
14.00-24	8.50	8.50V	1330	350	88	617	4164	-	■	8460	7685	7050	10645
			52.4	13.8	111	24.3	163.9	-	■	18700	16950	15550	23500





# CAMSO TM R4

## DURABLE OFF-ROAD PERFORMANCE

TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	SERVICE	APPLICATION	
			RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.					
400/80-24 IND (15.5/80-24)	-	TL	DW13	-	DW12	1244	409	34	571	3771	162	A8	IND. TRACTOR	CYCLIC
					DW13L	49.0	16.1	43	22.5	148.5				
					DW14L	1244	409	34	571	3771	162	A8	IND. TRACTOR	CONSTANT
					TW13	49.0	16.1	43	22.5	148.5				
440/80-24 IND (16.9-24 16.5/85-24)	-	TL	DW14L	-	DW13	1328	453	33	601	4016	168	A8	IND. TRACTOR	CYCLIC
					DW13L	52.3	17.8	42	23.7	158.1				
					DW15L	1328	453	33	601	4016	168	A8	IND. TRACTOR	CONSTANT
					TW13	52.3	17.8	42	23.7	158.1				
460/70-24 IND (17.5L-24)	-	TL	DW15L	-	DW14L	1264	455	31	578	3789	159	A8	IND. TRACTOR	CYCLIC
					DW16L	49.8	17.9	39	22.8	149.2				
					TW14L	1264	455	31	578	3789	159	A8	IND. TRACTOR	CONSTANT
					TW15L	49.8	17.9	39	22.8	149.2				
18-19.5	16	TL/TT	14.00	-	1117	454	32	505	3352	160	A8	MPT	DRIVE	
					44.0	17.9	40	19.9	132.0					
405/70-20 (16/70-20)	14	TL/TT	13x20	13SDC	1085	403	27	490	3238	154	A8	MPT	FREE	
					42.7	15.9	34	19.3	127.5					
405/70-20 (16/70-20)	14	TL/TT	13x20	13SDC	1085	403	27	490	3238	142	A8	MPT	DRIVE	
					42.7	15.9	34	19.3	127.5					
18-22.5	16	TL/TT	14.00	-	1209	444	35	545	3638	163	A8	MPT	DRIVE	
					47.6	17.5	44	21.5	143.2					

### FEATURES

- Stepped tread design
- Tapered tread lugs
- Optimized lug-to-void ratio
- Heavy-duty carcass

### BENEFITS

- Enhances tread cleanout for improved traction
- Improves lug stability for even wearing
- Enhances longevity and tread puncture resistance
- Provides excellent stability and side impact resistance

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]											
	STATIC	CREEP	5 km/h* 3 mph	10 km/h** 6 mph	15 km/h 9 mph	20 km/h 12 mph	25 km/h 15 mph	30 km/h 18 mph	35 km/h 21 mph	40 km/h 24 mph	45 km/h 28 mph	50 km/h 31 mph
5.00	10925	-	7935	7125	6365	5845	5275	5085	4895	4750	4560	4325
73	24085	-	17495	15710	14030	12885	11630	11210	10790	10470	10055	9535
5.00	10925	-	6890	5940	5370	5180	5035	4940	4845	4750	4560	4325
73	24085	-	15190	13095	11840	11420	11100	10890	10680	10470	10055	9535
5.00	12880	-	9350	8400	7505	6890	6215	5990	5770	5600	5375	5095
73	28395	-	20615	18520	16545	15190	13700	13205	12720	12345	11850	11230
5.00	12880	-	8120	7000	6330	6105	5935	5825	5710	5600	5375	5095
73	28395	-	17900	15430	13955	13460	13085	12840	12590	12345	11850	11230
4.00	10065	-	7305	6565	5865	5380	4855	4680	4505	4375	4200	3980
58	22190	-	16105	14475	12930	11860	10705	10320	9930	9645	9260	8775
4.00	10065	-	6345	5470	4945	4770	4640	4550	4465	4375	4200	3980
58	22190	-	13990	12060	10900	10515	10230	10030	9845	9645	9260	8775
5.85	7755	6715	6305	5985	5170	-	-	4765	-	4625	-	4490
85	17100	14800	13900	13200	11400	-	-	10500	-	10200	-	9900
3.50	6190	-	-	-	-	-	5250	4990	-	3375	-	4490
50	13650	-	-	-	-	-	11600	11000	-	7450	-	9900
3.50	6230	-	-	-	-	-	3710	3525	-	2385	-	-
50	13750	-	-	-	-	-	8200	7800	-	5250	-	-
4.50	9850	-	-	-	-	-	6825	6485	-	4390	-	-
64	21750	-	-	-	-	-	15050	14300	-	9700	-	-

\*Cyclic: One way distance up to 150 m (500 feet) \*\*Cyclic: One way distance up to 600 m (2000 feet)





# CAMSO MPT 753

THE NEXT GENERATION IN VERSATILITY AND DURABILITY

TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	SERVICE	APPLICATION
			RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.				
340/80-18 IND	-	TL	11	12 11 SDC, 12 SDC W10, W11	1005	350	21	*	*	143	A8	IND. TRACTOR	CYCLIC
					39.6	13.8	26	*	*				
340/80-18 IND	-	TL	11	12 11 SDC, 12 SDC W10, W11	1005	350	21	*	*	143	A8	IND. TRACTOR	CONSTANT
					39.6	13.8	26	*	*				
340/80-20 IND	-	TL	11	12 11 SDC, 12 SDC W10, W11	1067	355	25	*	*	144	A8	IND. TRACTOR	CYCLIC
					42.0	14.0	31	*	*				
340/80-20 IND	-	TL	11	12 11 SDC, 12 SDC W10, W11	1067	355	25	*	*	144	A8	IND. TRACTOR	CONSTANT
					42.0	14.0	31	*	*				
400/70-20 IND	-	TL	13	DW12 13 SDC DW13, DW13L DW14L	1100	405	27	*	*	155	A8	IND. TRACTOR	CYCLIC
					43.3	15.9	34	*	*				
400/70-20 IND	-	TL	13	DW12 13 SDC DW13, DW13L DW14L	1100	405	27	*	*	155	A8	IND. TRACTOR	CONSTANT
					43.3	15.9	34	*	*				
400/70-24 IND	-	TL	13	DW12 13SDC DW13, DW13L DW14L TW13, TW14L	1187	402	29	*	*	158	A8	IND. TRACTOR	CYCLIC
					46.7	15.8	37	*	*				
400/70-24 IND	-	TL	13	DW12 13SDC DW13, DW13L DW14L TW13, TW14L	1187	402	29	*	*	158	A8	IND. TRACTOR	CONSTANT
					46.7	15.8	37	*	*				
400/80-24 IND	-	TL	DW13	DW12 DW13L, DW14L TW13, TW14L	1244	412	33	*	*	162	A8	IND. TRACTOR	CYCLIC
					49.0	16.2	42	*	*				
400/80-24 IND	-	TL	DW13	DW12 DW13L, DW14L TW13, TW14L	1244	412	33	*	*	162	A8	IND. TRACTOR	CONSTANT
					49.0	16.2	42	*	*				
460/70-24 IND	-	TL	DW15L	DW14L, DW16L TW14L, TW15L TW16L	1251	453	33	*	*	159	A8	IND. TRACTOR	CYCLIC
					49.3	17.8	42	*	*				
460/70-24 IND	-	TL	DW15L	DW14L, DW16L TW14L, TW15L TW16L	1251	453	33	*	*	159	A8	IND. TRACTOR	CONSTANT
					49.3	17.8	42	*	*				

### FEATURES

- Flat non-directional tread pattern with high lug-to-void
- Void guard impact protection
- Impact guard sidewall design
- Stepped and open shoulder lugs

### BENEFITS

- Enhances stability, ride quality and durability
- Protects from tread punctures to minimize flat tires
- Deflects debris to better protect sidewalls and reduce stress cracking
- Maximizes tread cleanout on softer surfaces for improved traction

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]										
	STATIC	5 km/h* 3 mph	10 km/h** 6 mph	15 km/h 9 mph	20 km/h 12 mph	25 km/h 15 mph	30 km/h 18 mph	35 km/h 21 mph	40 km/h 24 mph	45 km/h 28 mph	50 km/h 31 mph
4.00	6270	4550	4090	3650	3350	3025	2915	2805	2725	2615	2480
58	13825	10030	9015	8045	7385	6670	6425	6185	6010	5765	5465
4.00	6270	3950	3405	3080	2970	2890	2835	2780	2725	2615	2480
58	13825	8710	7505	6790	6550	6370	6250	6130	6010	5765	5465
4.00	6440	4675	4200	3750	3445	3110	2995	2885	2800	2690	2550
58	14200	10305	9260	8265	7595	6855	6605	6360	6175	5930	5620
4.00	6440	4060	3500	3165	3050	2970	2910	2855	2800	2690	2550
58	14200	8950	7715	6980	6725	6550	6415	6295	6175	5930	5620
5.00	8915	6470	5815	5195	4765	4300	4145	3990	3875	3720	3525
73	19655	14265	12820	11455	10505	9480	9140	8795	8545	8200	7770
5.00	8915	5620	4845	4380	4225	4110	4030	3955	3875	3720	3525
73	19655	12390	10680	9655	9315	9060	8885	8720	8545	8200	7770
5.00	9775	7100	6375	5695	5230	4720	4550	4380	4250	4080	3870
73	21550	15655	14055	12555	11530	10405	10030	9655	9370	8995	8530
5.00	9775	6165	5315	4805	4635	4505	4420	4335	4250	4080	3870
73	21550	13590	11720	10595	10220	9930	9745	9555	9370	8995	8530
5.00	10925	7935	7125	6365	5845	5275	5085	4895	4750	4560	4325
73	24085	17495	15710	14030	12885	11630	11210	10790	10470	10055	9535
5.00	10925	6890	5940	5370	5180	5035	4940	4845	4750	4560	4325
73	24085	15190	13095	11840	11420	11100	10890	10680	10470	10055	9535
4.00	10065	7305	6565	5865	5380	4855	4680	4505	4375	4200	3980
58	22190	16105	14475	12930	11860	10705	10320	9930	9645	9260	8775
4.00	10065	6345	5470	4945	4770	4640	4550	4465	4375	4200	3980
58	22190	13990	12060	10900	10515	10230	10030	9845	9645	9260	8775

\* Cyclic: One way distance up to 150 m (500 feet) \*\* Cyclic: One way distance up to 600 m (2000 feet)



**CAMSO**  
**4L13**

**A SMOOTH RIDE WITH ENHANCED TRACTION**

TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	SERVICE	APPLICATION
			RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.				
10.0/75-15.3 IMP	8	TL/TT	9.00	-	784	266	19	-	-	119	A8	WITHOUT HLV	FREE ROLLING
					30.9	10.5	24	-	-				
					784	266	19	-	-	106	A8	WITHOUT HLV	DRIVE
					30.9	10.5	24	-	-				
11.5/80-15.3 IMP	10	TL/TT	9.00	-	847	294	25	-	-	131	A8	WITHOUT HLV	FREE ROLLING
					33.3	11.6	31	-	-				
					847	294	25	-	-	119	A8	WITHOUT HLV	DRIVE
					33.3	11.6	31	-	-				
11.5/80-15.3 IMP	14	TL/TT	9.00	-	840.0	301.0	21	-	-	139	A8	WITHOUT HLV	FREE ROLLING
					33.1	11.9	26	-	-				
					840.0	301.0	21	-	-	126	A8	WITHOUT HLV	DRIVE
					33.1	11.9	26	-	-				
10.5-18	10	TL/TT	-	9 9 (SDC)	907	271	22	-	-	130	B	MPT	-
35.7	10.7	28	-	-									
12.5-18	12	TL/TT	-	11 11 (SDC) 12 12 (SDC)	995	327	22	469	2969	135	B	MPT	-
					39.2	12.9	28	18.5	116.9				
12.5-18	16	TL/TT	-	-	1000	351	25	467	3016	141	B	MPT	-
					39.5	13.8	31	18.4	118.7				
10.5-20	10	TL/TT	-	9 9 (SDC)	950	278	22	423	2825	132	B	MPT	-
					37.4	10.9	28	16.7	111.2				
12.5-20	12	TL/TT	-	11 11 (SDC) 12 12 (SDC)	1054	348	23	471	3138	136	B	MPT	-
					41.5	13.7	29	18.5	123.5				
14.5-20	14	TL/TT	-	11 11 (SDC)	1107	359	27	490	3277	143	B	MPT	-
					43.6	14.1	34	19.3	129.0				
405/70-20 (16/70-20)	14	TL/TT	13x20	13SDC	1081	442	26	503	3183	154	A8	MPT	FREE
					42.6	17.4	33	19.8	125.3				
					1081	442	26	503	3183	142	A8	MPT	DRIVE
					42.6	17.4	33	19.8	125.3				
405/70-24 (16/70-24)	14	TL/TT	13x24	13SDC	1188	421	27	553	3516	156	A8	MPT	FREE
					46.8	16.6	34	21.8	138.4				
					1188	421	27	553	3516	144	A8	MPT	DRIVE
					46.8	16.6	34	21.8	138.4				

HLV: vehicles used on round trips (e.g. from field to farm) where on one way the vehicle is empty and on the other way the gross vehicle mass exceeds two times the mass of the empty vehicle, inclusive of the driver, if any: max 1km.

FEATURES	BENEFITS	PERFORMANCE
<ul style="list-style-type: none"> <li>Versatile directional tread pattern with center block</li> <li>Stepped tread design</li> <li>Open shoulder tread design</li> <li>Heavy-duty carcass</li> </ul>	<ul style="list-style-type: none"> <li>Reduces vibrations and enhances driving comfort</li> <li>Maximizes tread cleanout in off-road conditions for improved traction</li> <li>Provides excellent traction in off-road conditions</li> <li>Provides excellent stability and side impact resistance</li> </ul>	<p>TIRE LIFE</p> <p>PUNCTURE RESISTANCE</p> <p>TRACTION</p>

INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]										
	STATIC	5 km/h 3 mph	10 km/h 6 mph	15 km/h 9 mph	20 km/h 12 mph	25 km/h 15 mph	30 km/h 18 mph	35 km/h 21 mph	40 km/h 24 mph	45 km/h 28 mph	50 km/h 31 mph
3.10	2245	-	1905	1810	1715	1620	1525	1430	1360	1290	1225
45	4950	-	4200	3990	3780	3570	3360	3150	3000	2850	2700
3.10	2235	-	1330	1265	1195	1130	1065	1000	950	905	855
45	4925	-	2935	2785	2640	2495	2345	2200	2095	1990	1885
3.40	3220	-	2730	2595	2455	2320	2185	2050	1950	1855	1755
49	7095	-	6020	5720	5420	5115	4815	4515	4300	4085	3870
3.40	3195	-	1905	1810	1715	1620	1525	1430	1360	1290	1225
49	7050	-	4200	3990	3780	3570	3360	3150	3000	2850	2700
4.75	4010	-	3400	3230	3060	2890	2720	2550	2430	2310	2185
69	8835	-	7495	7120	6745	6370	6000	5625	5355	5085	4820
4.75	3995	-	2380	2260	2140	2025	1905	1785	1700	1615	1530
69	8815	-	5250	4990	4725	4465	4200	3940	3750	3565	3375
4.50	4250	3570	3060	2805	2550	2295	2125	2025	1955	1920	1905
65	9350	7850	6750	6200	5600	5050	4700	4450	4300	4250	4200
4.20	4875	4095	3510	3220	2925	2635	2440	2320	2245	2205	2185
61	10750	9050	7750	7100	6450	5800	5400	5100	4950	4850	4800
5.40	5750	4830	4140	3795	3450	3105	2875	2735	2645	2600	2575
78	12700	10650	9150	8350	7600	6850	6350	6050	5850	5750	5700
4.50	4500	3780	3240	2970	2700	2430	2250	2140	2070	2035	2015
65	9900	8350	7150	6550	5950	5350	4950	4700	4550	4500	4450
4.20	5000	4200	3600	3300	3000	2700	2500	2380	2300	2260	2240
61	11000	9250	7950	7300	6600	5950	5500	5250	5050	5000	4950
4.20	6075	5105	4375	4010	3645	3280	3040	2890	2795	2745	2720
61	13400	11250	9650	8850	8050	7250	6700	6350	6150	6050	6000
3.50	6190	-	-	-	-	5250	4990	-	3375	-	-
50	13650	-	-	-	-	11600	11000	-	7450	-	-
3.50	6230	-	-	-	-	3710	3525	-	2385	-	-
50	13750	-	-	-	-	8200	7800	-	5250	-	-
3.50	6600	-	-	-	-	5600	5320	-	3600	-	-
50	14550	-	-	-	-	12350	11750	-	7950	-	-
3.50	6580	-	-	-	-	3920	3725	-	2520	-	-
50	14550	-	-	-	-	8650	8200	-	5550	-	-





# CAMSO TM R1

## TRACTION THAT CAN'T BE BEAT

### FEATURES

- Aggresive R1 tread pattern
- Robust carcass design
- Heavy-duty sidewall

### BENEFITS

- Maximizes traction and improves ride quality
- Improves stability and side impact resistance
- Protects from side impact and flat tires

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



#	TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						LOAD INDEX	SPEED SYMBOL	TREAD CODE	SERVICE	APPLICATION
				RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.					
A	12.5/80-18 IMP	12	TL	W9	11	992	308	29	343	450	3005	142	A8	I-3	WITHOUT HLV	FREE ROLLING
						39.1	12.1	37	13.5	17.7	118.3					
						992	308	29	343	450	3005	129	A8	I-3	WITHOUT HLV	DRIVE
						39.1	12.1	37	13.5	17.7	118.3					

#	INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]									
		STATIC	10 km/h 6 mph	15 km/h 9 mph	20 km/h 12 mph	25 km/h 15 mph	30 km/h 18 mph	35 km/h 21 mph	40 km/h 24 mph	45 km/h 28 mph	50 km/h 31 mph
A	3.70	4375	3710	3525	3340	3155	2970	2785	2650	2520	2385
	54	9635	8175	7765	7360	6950	6540	6130	5840	5550	5255
	3.70	4350	2590	2460	2330	2200	2070	1945	1850	1760	1665
	54	9590	5710	5425	5140	4855	4570	4285	4080	3875	3670

HLV: vehicles used on round trips (e.g. from field to farm) where on one way the vehicle is empty and on the other way the gross vehicle mass exceeds two times the mass of the empty vehicle, inclusive of the driver, if any: max 1km.



# CAMSO MPT 793S

## SEVERE-DUTY FLAT-FREE TIRE SOLUTION

### FEATURES

- Engineered solid tire solution
- Massive non directional tread pattern
- Triangular aperture sidewall design
- Stepped shoulder lugs

### BENEFITS

- Provides flat-free operation and ultimate durability
- Improves durability and traction
- Maximizes stability and ride quality
- Enhances tread cleanout for better traction in softer surfaces

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



TIRE SIZE	HEEL WIDTH	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] [inches]					HEEL		LOAD CAPACITY [kg] [lb]			
			O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.	NORMAL	QUICK	OTHER VEHICLES			STATIC
										6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
385/70-20	10.00	10.00	1039*	385*	55*	*	*	-	■	9900	8995	8250	12460
			40.9*	15.2*	69*	-	-			21825	19830	18190	27470



**CAMSO  
WL**

**HIGH PERFORMANCE. MAXIMUM PROTECTION**

TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [Inches]						LOAD INDEX	SPEED SYMBOL
			RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.		
8.25-20	14	TT	6.50	7.00	1000	252	26	272	486	2985	148	A2
					39.4	9.9	33	10.7	19.1	117.5		
					1000	252	26	272	486	2985	148	A2
					39.4	9.9	33	10.7	19.1	117.5		
9.00-20	14	TT	7.00	6.50/7.50	1040	267	27	301	485	3101	153	A2
					40.9	10.5	34	11.9	19.1	122.1		
					1039	267	27	301	485	3101	153	A2
					40.9	10.5	34	11.9	19.1	122.1		
10.00-20	16	TT	7.50	7.00/8.00	1070	283	26	316	496	3226	158	A2
					42.1	11.1	33	12.4	19.5	127.0		
					1070	283	26	316	496	3226	158	A2
					42.1	11.1	33	12.4	19.5	127.0		
11.00-20	16	TT	8.00	8.50	1100	301	22	334	512	3376	160	A2
					43.3	11.9	28	13.1	20.2	132.9		
					1100	301	22	334	512	3376	160	A2
					43.3	11.9	28	13.1	20.2	132.9		

**FEATURES**

- Heavy-duty carcass
- Large casing design
- Extra-deep lug depth
- Premium rubber compounds

**BENEFITS**

- Provides best stability and side impact resistance
- Improves ride quality and stability
- Provides best durability and traction
- Provides best durability and cut resistance

**PERFORMANCE**

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



MAXIMUM TIRE LOAD [kg] [lb]					
ALL SURFACES			IMPROVED SURFACES		
STATIC	CREEP	0-8 km/h 0-5 mph	10 km/h 6 mph	25 km/h 16 mph	45 km/h 28 mph
6105	5120	3645	3150	2600	2325
13500	11300	8050	6950	5750	5150
9.00 bar	9.00 bar	8.00 bar	8.00 bar	7.50 bar	7.50 bar
129 psi	129 psi	114 psi	114 psi	107 psi	107 psi
6990	5860	4170	3605	2975	2660
15450	12950	9200	7950	6550	5850
8.50 bar	8.50 bar	7.50 bar	7.50 bar	7.00 bar	7.00 bar
121 psi	121 psi	107 psi	107 psi	100 psi	100 psi
8215	6890	4900	4240	3500	3125
18150	15200	10800	9350	7750	6900
8.50 bar	8.50 bar	8.00 bar	8.00 bar	7.50 bar	7.50 bar
121 psi	121 psi	114 psi	114 psi	107 psi	107 psi
8700	7300	5200	4500	3700	3300
19200	16100	11500	9950	8150	7300
8.50 bar	8.50 bar	7.75 bar	7.75 bar	7.00 bar	7.00 bar
121 psi	121 psi	111 psi	111 psi	100 psi	100 psi



# CAMSO WEX 552

Formerly Solideal WEX

## PERFORMANCE AND QUALITY YOU CAN COUNT ON

TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						LOAD INDEX	SPEED SYMBOL
			RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.		
9.00-20	14	TT	7.00	6.50/7.50	1022	267	19.5	302	448	3090	153	A2
					40.2	10.5	25	11.9	17.6	121.7		
					1022	267	19.5	302	448	3090	153	A2
					40.2	10.5	25	11.9	17.6	121.7		
10.00-20	14	TT	7.50	7.00/8.00	1064	281	21	325	461	3208	155	A2
					41.9	11.1	26	12.8	18.1	126.3		
					1064	281	21	325	461	3208	155	A2
					41.9	11.1	26	12.8	18.1	126.3		
10.00-20	16	TT	7.50	7.00/8.00	1064	281	21	325	461	3208	158	A2
					41.9	11.1	26	12.8	18.1	126.3		
					1064	281	21	325	461	3208	158	A2
					41.9	11.1	26	12.8	18.1	126.3		

### FEATURES

- Robust carcass
- Advanced rubber compounds
- Deep lug depth

### BENEFITS

- Enhances stability and side impact resistance
- Improves durability and cut resistance
- Enhances durability and traction

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



MAXIMUM TIRE LOAD [kg] [lb]					
ALL SURFACES			IMPROVED SURFACES		
STATIC	CREEP	0-8 km/h 0-5 mph	10 km/h 6 mph	25 km/h 16 mph	45 km/h 28 mph
6990	5860	4170	3605	2975	2660
15450	12950	9200	7950	6550	5850
8.50 bar	8.50 bar	7.50 bar	7.50 bar	7.00 bar	7.00 bar
121 psi	121 psi	107 psi	107 psi	100 psi	100 psi
7455	6255	4450	3850	3175	2840
16450	13800	9800	8500	7000	6250
7.5 bar	7.5 bar	7.0 bar	7.0 bar	6.0bar	6.0bar
107 psi	107 psi	100 psi	100 psi	87 psi	87 psi
8215	6890	4900	4240	3500	3125
18150	15200	10800	9350	7750	6900
8.50 bar	8.50 bar	8.00 bar	8.00 bar	7.50 bar	7.50 bar
121 psi	121 psi	114 psi	114 psi	107 psi	107 psi



# CAMSO WEX 583S

Formerly Solideal Bagger HT

## SOLID PUNCTURE PROOF SOLUTION FOR SEVERE CONDITIONS

### FEATURES

- Solid multi-stage construction
- Aggressive tread design
- Optimized lug-to-void ratio

### BENEFITS

- Provides flat-free operation and good ride quality
- Provides enhanced traction in off-road conditions
- Enhances chunking resistance and stability

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



# CAMSO CMP 533

## COMPACTION PERFORMANCE AND DURABILITY SOLUTION

### FEATURES

- Optimized tread pattern
- Robust carcass design
- Flatter tread profile
- Engineered tread profile with stepped tread design and shoulder lugs

### BENEFITS

- Minimizes ground pressure and damage for better compaction performance
- Enhances side impact resistance for fewer flats
- Ensures even tread wearing for greater durability
- Enhances traction for improved performance

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



TIRE SIZE	HEEL WIDTH	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] [inches]					HEEL		LOAD CAPACITY [kg] [lb]			
			O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.	NORMAL	QUICK	OTHER VEHICLES			STATIC
										6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	
9.00-20	7.00	7.00	974	224	40	391	2669	■	-	5400	4905	4500	6795
			38.3	8.8	50	15.4	105.1			11900	10800	9900	15000
10.00-20	7.00 7.50 8.00	7.00 7.50 8.00	1007	244	35	474	3184	■	-	6000	5450	5000	7550
			39.6	9.6	44	18.7	125.4			13250	12000	11000	16650
12.00-20	8.00 8.50	8.00 8.50	1088	259	38	507	3418	■	-	7560	6865	6300	9515
			42.8	10.2	48	20.0	134.6			16650	15150	13900	21000
12.00-24	8.50	8.50	1178	278	33	554	3716	■	-	8040	7305	6700	10115
			46.4	10.9	42	21.8	146.3			17750	16100	14750	22300
14.00-24	10.00	10.00	1330	333	29	620	4147	■	-	11000	10085	9250	13970
			52.4	13.1	37	24.4	163.3			24250	22250	20400	30800

TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						LOAD INDEX	SPEED SYMBOL	IP [bar] [psi]	LOAD CAPACITY [kg] [lb]	
			RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.				10 km/h 6 mph	15 km/h 9 mph
62.7	23.2	34	28.6	26.3	184.6	13100	11850								



# CAMSO CMP 576

Formerly Solideal SM C1

## EXCELLENT COMPACTION PERFORMANCE

### FEATURES

- Smooth, flat tread profile
- Heat-resistant rubber compound
- Robust tread shoulder

### BENEFITS

- Promotes even wear and reduced ground pressure for better compaction performance
- Improves durability for lower cost per hour
- Provides optimum compaction and minimal grooving

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



# CAMSO MST 776

## BEST HARD SURFACE DURABILITY

### FEATURES

- Massive L5 smooth tread pattern
- Dual premium rubber compounds
- Impact guard sidewall design
- Rim guard protector

### BENEFITS

- Ensures long service life and great puncture resistance
- Protects against tread cuts and reduces carcass heat build-up
- Deflects debris to better protect sidewalls
- Protects wheel for longer life and constant inflation and reduce stress cracking

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	JP [bar] [psi]	LOAD CAPACITY [kg] [lb]	
			RECOMMENDED	ALTERNATIVE	O.D.	O.W.	M.D.S.	S.L.R.	R.C.				10 km/h 6 mph	15 km/h 9 mph
7.50-15 NHS	14	TT	6.00	6.50	788	214	226	362	2352	136	A3	8.50	2835	2270
					31.0	8.4	8.9	14.3	92.6				121	5000
8.50/90-15K	6	TL	6.00	5.5F	761	217	246	342	-	120	A3	3.50	1770	1400
					30.0	8.5	9.7	13.5	-				50	3100
11.00-20 NHS	16	TT	8.00	8.50	1053	287	313	493	3307	167	A2	7.40	5500	4355
					41.5	11.3	12.3	19.4	130.2				107	9600
11.00-20 NHS	18	TT	8.00	8.50	1060	291	321	498	3284	169	A2	8.40	5900	-
					41.7	11.5	12.6	19.6	129.3				122	13005

#	TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	TREAD CODE	SERVICE
				RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.				
A	12.00-24	24	TT	8.50	8.00	1275	327	56	603	3981	178	A2	L-5S	LOADER-DOZER
						50.2	12.9	71	23.7	156.7				

#	INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]											
		STATIC	CREEP	5 km/h 3 mph	10 km/h 6 mph	15 km/h 9 mph	20 km/h 12 mph	25 km/h 15 mph	30 km/h 18 mph	35 km/h 21 mph	40 km/h 24 mph	45 km/h 28 mph	50 km/h 31 mph
A	9.75	12000	9750	8550	7500	6550	6300	6000	5800	5550	5250	5050	4725
	141	26455	21495	18850	16535	14440	13890	13230	12785	12235	11575	11135	10415







# CAMSO ADT 753R

Formerly Solideal SRAT

## RADIAL PERFORMANCE MEETS HIGH TRACTION

TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	TREAD CODE	SERVICE	APPLICATION
			RECOMMENDED	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.						
20.5R25	**	TL	17.00/2.0	1485	524	31	663	4460	193	A2	L-3	LOADER - DOZER	10 km/h	
				58.5	20.6	39	26.1	175.6					5 mph	
				1485	524	31	663	4460	177	B	E-3	EARTHMOVER	50 km/h	
				58.5	20.6	39	26.1	175.6					30 mph	
				1485	524	31	663	4460	161	A8	G-3	GRADER	40 km/h	
				58.5	20.6	39	26.1	175.6					25 mph	
23.5R25	**	TL	19.50/2.5	1615	614	29	716	4850	201	A2	L-3	LOADER - DOZER	10 km/h	
				63.6	24.2	37	28.2	190.9					5 mph	
				1615	614	29	716	4850	185	B	E-3	EARTHMOVER	50 km/h	
				63.6	24.2	37	28.2	190.9					30 mph	
26.5R25	**	TL	22.00/3.0	1736	688	33	767	5236	209	A2	L-3	LOADER - DOZER	10 km/h	
				68.3	27.1	42	30.2	206.1					5 mph	
				1736	688	33	767	5236	193	B	E-3	EARTHMOVER	50 km/h	
				68.3	27.1	42	30.2	206.1					30 mph	
29.5R25	**	TL	25.00/3.5	1871	777	38	817	5619	216	A2	L-3	LOADER - DOZER	10 km/h	
				73.7	30.6	48	32.2	221.2					5 mph	
				1871	777	38	817	5619	200	B	E-3	EARTHMOVER	50 km/h	
				73.7	30.6	48	32.2	221.2					30 mph	

**LOADER – DOZER**  
Max speed % change to loads in above 10 km/h

STATIONARY	+60%	
CREEP	+30%	
4 km/h	2.5 mph	+15%
10 km/h	5 mph	No change
15 km/h	10 mph	-13%
25 km/h	15 mph	-20%

One way distance up to 76 m (250 feet)

**GRADER**  
Max speed % change to loads in above 40 km/h

40 km/h	25 mph	No change
50 km/h	30 mph	-9%
60 km/h	35 mph	-18%
65 km/h	40 mph	-27%
	10 mph	-13%
	15 mph	-20%

**EARTHMOVER**  
Max speed % change to loads in above 50 km/h

50 km/h	30 mph	No change
65 km/h	40 mph	-12%

One way distance up to 4 km (2.5 miles)

CREEP: Movement of equipment at very slow speed (not over 60 m (200 feet) in 30 minutes). During creep motion, loads on the tire are very high and consideration must be given to the type of surface over which the equipment is travelling.

For maintenance work on established highways, inflation pressures may be increased 50% if desired, with no increase in loads. For slope and ditching service, inflation pressures should be increased 100 kpa (15 psi) with no increase in load rating.

### FEATURES

- Heavy-duty Dual-Star carcass
- Non-directional tread pattern with optimized lug-to-void ratio
- Deep tread depth
- Premium rubber compounds

### BENEFITS

- Optimizes stability for articulated dump truck applications
- Increases traction and durability in off-road conditions
- Enhances traction in off-road conditions
- Reduces heat build-up

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



MAXIMUM TIRE LOAD AT REFERENCE SPEED [kg] [lb] AND MAXIMUM INFLATION PRESSURE [bar] [psi]																				
1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	
25	29	32	36	39	43	46	50	54	57	61	64	68	71	75	79	82	86	89	93	
-	4750	5150	5600	6000	6300	6700	7100	7500	8000	8250	8750	9000	9500	9750	10000	10300	10900	11200	11500	
-	10500	11400	12300	13200	13900	14800	15700	16500	17600	18200	19300	19800	20900	21500	22000	22700	24000	24700	25400	
-	-	-	-	4375	4750	5000	5300	5600	5800	6150	6500	6700	6900	7300	-	-	-	-	-	
-	-	-	-	9650	10500	11000	11700	12300	12800	13600	14300	14800	15200	16100	-	-	-	-	-	
3150	3450	3875	4125	4375	4625	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
6950	7600	8550	9100	9650	10200	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	6000	6500	7100	7750	8250	8750	9250	9750	10300	10600	11200	11500	12150	12500	12850	13200	13600	14000	14500	
-	13200	14300	15700	17100	18200	19300	20400	21500	22700	23400	24700	25400	26800	27600	28300	29100	30000	30900	32000	
-	-	-	-	5600	6000	6500	6700	7100	7500	7750	8250	8500	9000	9250	-	-	-	-	-	
-	-	-	-	12300	13200	14300	14800	15700	16500	17100	18200	18700	19800	20400	-	-	-	-	-	
-	7500	8250	9000	9500	10300	10900	11500	12150	12850	13200	14000	14500	15000	15500	16000	16500	17000	18000	18500	
-	16500	18200	19800	20900	22700	24000	25400	26800	28300	29100	30900	32000	33100	34200	35300	36400	37500	39700	40800	
-	-	-	-	7100	7500	8000	8500	9000	9500	9750	10300	10600	11200	11500	-	-	-	-	-	
-	-	-	-	15700	16500	17600	18700	19800	20900	21500	22700	23400	24700	25400	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	15500	16000	17000	17500	18000	19000	19500	20000	20600	21200	22400	
-	-	-	-	-	-	-	-	-	34200	35300	37500	38600	39700	41900	43000	44100	45400	46700	49400	
-	-	-	-	8500	9250	9750	10300	10900	11500	11800	12500	12850	13600	14000	-	-	-	-	-	
-	-	-	-	18700	20400	21500	22700	24000	25400	26000	27600	28300	30000	30900	-	-	-	-	-	



# CAMSO WHL 775R

Formerly Solideal SRLD L5

**MULTI-SURFACE DURABILITY AT ITS BEST**

TIRE SIZE	PR	TL/TT	RIM SIZE RECOMMENDED	ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	TREAD CODE	SERVICE	APPLICATION
				O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.					
20.5R25	**	TL	17.00/2.0	1544	517	74	704	4637	193	A2	L-5	LOADER – DOZER	10 km/h
				60.8	20.4	93	27.7	182.6					5 mph
				1544	517	74	704	4637	177	B	L-5	EARTHMOVER	50 km/h
				60.8	20.4	93	27.7	182.6					30 mph
				1544	517	74	704	4637					161
60.8	20.4	93	27.7	182.6	25 mph								
23.5R25	**	TL	19.50/2.5	1673	605	80	751	5025	201	A2	L-5	LOADER – DOZER	10 km/h
				65.9	23.8	101	29.6	197.8					5 mph
				1673	605	80	751	5025	185	B	E-5	EARTHMOVER	50 km/h
				65.9	23.8	101	29.6	197.8					30 mph
26.5R25	**	TL	22.00/3.0	1791	700	86	801	5379	209	A2	L-5	LOADER – DOZER	10 km/h
				70.5	27.6	108	31.5	211.8					5 mph
				1791	700	86	801	5379	193	B	E-5	EARTHMOVER	50 km/h
				70.5	27.6	108	31.5	211.8					30 mph
29.5R25	**	TL	25.00/3.5	1915	790	92	855	5751	216	A2	L-5	LOADER – DOZER	10 km/h
				75.4	31.1	116	33.7	226.4					5 mph
				1915	790	92	855	5751	200	B	L-5	EARTHMOVER	50 km/h
				75.4	31.1	116	33.7	226.4					30 mph

**LOADER – DOZER**  
Max speed % change to loads in above 10 km/h

STATIONARY	+60%	
CREEP	+30%	
4 km/h	2.5 mph	+15%
10 km/h	5 mph	No change
15 km/h	10 mph	-13%
25 km/h	15 mph	-20%

One way distance up to 76 m (250 feet)

**GRADER**  
Max speed % change to loads in above 40 km/h

40 km/h	25 mph	No change
50 km/h	30 mph	-9%
60 km/h	35 mph	-18%
65 km/h	40 mph	-27%
	10 mph	-13%
	15 mph	-20%

**EARTHMOVER**  
Max speed % change to loads in above 50 km/h

50 km/h	30 mph	No change
65 km/h	40 mph	-12%

One way distance up to 4 km (2.5 miles)

CREEP: Movement of equipment at very slow speed (not over 60 m (200 feet) in 30 minutes). During creep motion, loads on the tire are very high and consideration must be given to the type of surface over which the equipment is travelling.

For maintenance work on established highways, inflation pressures may be increased 50% if desired with no increase in loads. For slope and ditching service, inflation pressures should be increased 100 kpa (15 psi) with no increase in load rating.

FEATURES	BENEFITS	PERFORMANCE
<ul style="list-style-type: none"> <li>Extra-deep lug tread</li> </ul>	<ul style="list-style-type: none"> <li>Enhances durability and resistance to flat tires for extreme mixed and hard surface applications</li> </ul>	<b>TIRE LIFE</b> 
<ul style="list-style-type: none"> <li>Robust Dual-Star carcass</li> </ul>	<ul style="list-style-type: none"> <li>Provides excellent stability and enhanced loading capacity</li> </ul>	<b>PUNCTURE RESISTANCE</b> 
<ul style="list-style-type: none"> <li>Contoured lug base</li> </ul>	<ul style="list-style-type: none"> <li>Promotes stone ejection and resistance to cracking</li> </ul>	<b>TRACTION</b> 
<ul style="list-style-type: none"> <li>Heavy-duty sidewall construction</li> </ul>	<ul style="list-style-type: none"> <li>Protects against side impacts and deformation under heavy load</li> </ul>	

MAXIMUM TIRE LOAD AT REFERENCE SPEED [kg] [lb] AND MAXIMUM INFLATION PRESSURE [bar] [psi]																			
1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50
25	29	32	36	39	43	46	50	54	57	61	64	68	71	75	79	82	86	89	93
-	4750	5150	5600	6000	6300	6700	7100	7500	8000	8250	8750	9000	9500	9750	10000	10300	10900	11200	11500
-	10500	11400	12300	13200	13900	14800	15700	16500	17600	18200	19300	19800	20900	21500	22000	22700	24000	24700	25400
-	-	-	-	4375	4750	5000	5300	5600	5800	6150	6500	6700	6900	7300	-	-	-	-	-
-	-	-	-	9650	10500	11000	11700	12300	12800	13600	14300	14800	15200	16100	-	-	-	-	-
3150	3450	3875	4125	4375	4625	-	-	-	-	-	-	-	-	-	-	-	-	-	-
6950	7600	8550	9100	9650	10200	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	6000	6500	7100	7750	8250	8750	9250	9750	10300	10600	11200	11500	12150	12500	12850	13200	13600	14000	14500
-	13200	14300	15700	17100	18200	19300	20400	21500	22700	23400	24700	25400	26800	27600	28300	29100	30000	30900	32000
-	-	-	-	5600	6000	6500	6700	7100	7500	7750	8250	8500	9000	9250	-	-	-	-	-
-	-	-	-	12300	13200	14300	14800	15700	16500	17100	18200	18700	19800	20400	-	-	-	-	-
-	7500	8250	9000	9500	10300	10900	11500	12150	12850	13200	14000	14500	15000	15500	16000	16500	17000	18000	18500
-	16500	18200	19800	20900	22700	24000	25400	26800	28300	29100	30900	32000	33100	34200	35300	36400	37500	39700	40800
-	-	-	-	7100	7500	8000	8500	9000	9500	9750	10300	10600	11200	11500	-	-	-	-	-
-	-	-	-	15700	16500	17600	18700	19800	20900	21500	22700	23400	24700	25400	-	-	-	-	-
-	-	-	-	-	-	-	-	-	15500	16000	17000	17500	18000	19000	19500	20000	20600	21200	22400
-	-	-	-	-	-	-	-	-	34200	35300	37500	38600	39700	41900	43000	44100	45400	46700	49400
-	-	-	-	8500	9250	9750	10300	10900	11500	11800	12500	12850	13600	14000	-	-	-	-	-
-	-	-	-	18700	20400	21500	22700	24000	25400	26000	27600	28300	30000	30900	-	-	-	-	-



# CAMSO WHL 776R

Formerly Solideal SRLS L5S

## HARD SURFACE DURABILITY AT ITS BEST

TIRE SIZE	PR	TL/TT	RIM SIZE RECOMMENDED	ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	TREAD CODE	SERVICE	APPLICATION
				O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.					
17.5R25	**	TL	14.00/1.5	1402	443	75	646	4211	182	A2	L-5	LOADER – DOZER	10 km/h
				55.2	17.4	94	25.4	165.8					5 mph
				1402	443	75	646	4211	167	B	E-5	EARTHMOVER	50 km/h
				55.2	17.4	94	25.4	165.8					30 mph
23.5R25	**	TL	19.50/2.5	1673	623	80	762	5025	201	A2	L-5	LOADER – DOZER	10 km/h
				65.9	24.5	101	30.0	197.8					5 mph
				1673	623	80	762	5025	185	B	E-5	EARTHMOVER	50 km/h
				65.9	24.5	101	30.0	197.8					30 mph
26.5R25	**	TL	22.00/3.0	1785	709	86	800	5361	209	A2	L-5	LOADER – DOZER	10 km/h
				70.3	27.9	108	31.5	211.1					5 mph
				1785	709	86	800	5361	193	B	E-5	EARTHMOVER	50 km/h
				70.3	27.9	108	31.5	211.1					30 mph

**LOADER – DOZER**  
Max speed % change to loads in above 10 km/h

STATIONARY	+60%	
CREEP	+30%	
4 km/h	2.5 mph	+15%
10 km/h	5 mph	No change
15 km/h	10 mph	-13%
25 km/h	15 mph	-20%

One way distance up to 76 m (250 feet)

**EARTHMOVER**  
Max speed % change to loads in above 50 km/h

50 km/h	30 mph	No change
65 km/h	40 mph	-12%

One way distance up to 4 km (2.5 miles)

CREEP: Movement of equipment at very slow speed (not over 60 m (200 feet) in 30 minutes). During creep motion, loads on the tire are very high and consideration must be given to the type of surface over which the equipment is travelling.

### FEATURES

- Extra-deep smooth tread
- Robust Dual-Star carcass
- Flat tread profile
- Heavy-duty sidewall construction

### BENEFITS

- Best durability and resistance to flat tires for extreme hard surface applications
- Provides excellent stability and enhanced loading capability
- Provides enhanced stability and even wear
- Protects against side impacts and deformation under heavy load

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



MAXIMUM TIRE LOAD AT REFERENCE SPEED [kg] [lb] AND MAXIMUM INFLATION PRESSURE [bar] [psi]																				
1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	
25	29	32	36	39	43	46	50	54	57	61	64	68	71	75	79	82	86	89	93	
-	3650	4000	4250	4625	4850	5300	5600	5800	6000	6150	6500	6700	7100	7300	7500	7750	8000	8250	8500	
-	8050	8800	9350	10200	10700	11700	12300	12800	13200	13600	14300	14800	15700	16100	16500	17100	17600	18200	18700	
-	-	-	-	3350	3550	3750	4000	4125	4375	4625	4750	5000	5150	5450	-	-	-	-	-	
-	-	-	-	7400	7850	8250	8800	9100	9650	10200	10500	11000	11400	12000	-	-	-	-	-	
-	6000	6500	7100	7750	8250	8750	9250	9750	10300	10600	11200	11500	12150	12500	12850	13200	13600	14000	14500	
-	13200	14300	15700	17100	18200	19300	20400	21500	22700	23400	24700	25400	26800	27600	28300	29100	30000	30900	32000	
-	-	-	-	5600	6000	6500	6700	7100	7500	7750	8250	8500	9000	9250	-	-	-	-	-	
-	-	-	-	12300	13200	14300	14800	15700	16500	17100	18200	18700	19800	20400	-	-	-	-	-	
-	7500	8250	9000	9500	10300	10900	11500	12150	12850	13200	14000	14500	15000	15500	16000	16500	17000	18000	18500	
-	16500	18200	19800	20900	22700	24000	25400	26800	28300	29100	30900	32000	33100	34200	35300	36400	37500	39700	40800	
-	-	-	-	7100	7500	8000	8500	9000	9500	9750	10300	10600	11200	11500	-	-	-	-	-	
-	-	-	-	15700	16500	17600	18700	19800	20900	21500	22700	23400	24700	25400	-	-	-	-	-	







# CAMSO LM L3 (cont.)

## MULTI-SURFACE PERFORMANCE

TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	TREAD CODE	SERVICE
			RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.				
20.5-25	20	TL	17.00/2.0	-	1507	546	30	669	4478	186	A2	L-3	LOADER-DOZER
					59.3	21.5	38	26.3	176.3				
					1507	546	30	669	4478	170	B	E-3	EARTHMOVER
					59.3	21.5	38	26.3	176.3				
23.5-25	20	TL	19.50/2.5	-	1616	627	37	729	4835	191	A2	L-3	LOADER-DOZER
					63.6	24.7	47	28.7	190.4				
					1616	627	37	729	4835	177	B	E-3	EARTHMOVER
					63.6	24.7	47	28.7	190.4				
23.5-25	24	TL	19.50/2.5	-	1630	630	37	734	4865	196	A2	L-3	LOADER-DOZER
					64.2	24.8	47	28.9	191.5				
					1630	630	37	734	4865	180	B	E-3	EARTHMOVER
					64.2	24.8	47	28.9	191.5				
26.5-25	20	TL	22.00/3.0	-	1752	691	40	781	5229	198	A2	L-3	LOADER-DOZER
					69.0	27.2	50	30.7	205.9				
					1752	691	40	781	5229	181	B	E-3	EARTHMOVER
					69.0	27.2	50	30.7	205.9				
26.5-25	28	TL	22.00/3.0	-	1748	693	40	786	5274	203	A2	L-3	LOADER-DOZER
					68.8	27.3	50	30.9	207.6				
					1748	693	40	786	5274	188	B	E-3	EARTHMOVER
					68.8	27.3	50	30.9	207.6				
29.5-25	28	TL	25.00/3.5	-	1873	770	36	835	5590	207	A2	L-3	LOADER-DOZER
					73.7	30.3	45	32.9	220.1				
					1873	770	36	835	5590	193	B	E-3	EARTHMOVER
					73.7	30.3	45	32.9	220.1				

### FEATURES

- Heavy-duty carcass
- Non-directional tread pattern with optimized lug-to-void ratio
- Stepped tread design
- Deep and flat tread profile

### BENEFITS

- Increases side impact resistance and stability
- Ensures even tread wearing for greater durability
- Enhances tread cleanout for improved traction
- Reduces tread crowning for improved durability

### PERFORMANCE



INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]															
	STATIC	CREEP	5 km/h 3 mph	10 km/h 6 mph	15 km/h 9 mph	20 km/h 12 mph	25 km/h 15 mph	30 km/h 18 mph	35 km/h 21 mph	40 km/h 24 mph	45 km/h 28 mph	50 km/h 31 mph	55 km/h 34 mph	60 km/h 37 mph	65 km/h 40 mph	
4.50	15200	12400	10800	9500	8250	8000	7600	7300	7050	6650	6365	5985	-	-	-	
65	33510	27335	23810	20945	18190	17635	16755	16095	15545	14660	14030	13195	-	-	-	
3.25	-	-	-	-	6720	6600	6480	6360	6240	6180	6120	6000	5800	5500	4975	
47	-	-	-	-	14815	14550	14285	14020	13755	13625	13490	13230	12785	12125	10970	
3.75	17400	14200	12400	10900	9500	9150	8700	8400	8050	7650	7305	6865	-	-	-	
54	38360	31305	27335	24030	20945	20170	19180	18520	17745	16865	16105	15135	-	-	-	
3.00	-	-	-	-	8200	8050	7900	7750	7600	7500	7450	7300	7100	6700	6050	
44	-	-	-	-	18080	17745	17415	17085	16755	16535	16425	16095	15655	14770	13340	
4.75	20000	16300	14300	12500	10900	10500	10000	9650	9250	8750	8375	7875	-	-	-	
69	44090	35935	31525	27560	24030	23150	22045	21275	20395	19290	18465	17360	-	-	-	
3.50	-	-	-	-	8950	8800	8650	8500	8300	8250	8150	8000	7750	7350	6650	
51	-	-	-	-	19730	19400	19070	18740	18300	18190	17970	17635	17085	16205	14660	
3.50	21100	17200	15000	13200	11500	11100	10600	10200	9750	9250	8845	8315	-	-	-	
51	46520	37920	33070	29100	25355	24470	23370	22485	21495	20395	19500	18330	-	-	-	
2.50	-	-	-	-	9250	9100	8900	8750	8600	8500	8400	8250	8000	7600	6850	
36	-	-	-	-	20395	20060	19620	19290	18960	18740	18520	18190	17635	16755	15100	
4.75	24800	20200	17700	15500	13500	13000	12400	11900	11500	10900	10385	9765	-	-	-	
69	54675	44535	39020	34170	29760	28660	27335	26235	25350	24030	22895	21530	-	-	-	
3.50	-	-	-	-	11200	11000	10800	10600	10400	10300	10200	10000	9700	9200	8300	
51	-	-	-	-	24690	24250	23810	23370	22930	22710	22485	22045	21385	20285	18300	
4.25	28000	22800	20000	17500	15200	14700	14000	13500	13000	12300	11725	11025	-	-	-	
62	61730	50265	44090	38580	33510	32410	30865	29760	28660	27115	25850	24305	-	-	-	
3.25	-	-	-	-	12880	12650	12420	12190	11960	11845	11730	11500	11155	10580	9545	
47	-	-	-	-	28395	27890	27380	26875	26365	26115	25860	25355	24595	23325	21045	



# CAMSO WHL 773

## RELIABLE PERFORMANCE IN HARSH APPLICATIONS

TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	TREAD CODE	SERVICE
			RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.				
17.5-25	16	TL	14.00/1.5	14.00/1.3 13.00/1.4 (DC)	1355	460	27	622	4087	177	A2	L-3	LOADER-DOZER
					53.3	18.1	34	24.5	160.9				
					1355	460	27	622	4087	158	B	E-3	EARTHMOVER
					53.3	18.1	34	24.5	160.9				
					1355	460	27	622	4087				
53.3	18.1	34	24.5	160.9	150	A8	G-3	GRADER					
1489	541	28	674	4491									
20.5-25	20	TL	17.00/2.0	-	58.6	21.3	35	26.5	176.8	186	A2	L-3	LOADER-DOZER
					1489	541	28	674	4491				
					58.6	21.3	35	26.5	176.8	170	B	E-3	EARTHMOVER
					1489	541	28	674	4491				
					58.6	21.3	35	26.5	176.8				
1489	541	28	674	4491	160	A8	G-3	GRADER					
58.6	21.3	35	26.5	176.8									
23.5-25	20	TL	19.50/2.5	-	1613	615	33	725	4865	191	A2	L-3	LOADER-DOZER
					63.5	24.2	42	28.5	191.5				
					1613	615	33	725	4865	177	B	E-3	EARTHMOVER
					63.5	24.2	42	28.5	191.5				
23.5-25	24	TL	19.50/2.5	-	1613	620	33	727	4865	196	A2	L-3	LOADER-DOZER
					63.5	24.4	42	28.6	191.5				
					1613	620	33	727	4865	180	B	E-3	EARTHMOVER
					63.5	24.4	42	28.6	191.5				
26.5-25	28	TL	22.00/3.0	-	1745	682	37	777	5263	203	A2	L-3	LOADER-DOZER
					68.7	26.9	47	30.6	207.2				
					1745	682	37	777	5263	188	B	E-3	EARTHMOVER
					68.7	26.9	47	30.6	207.2				

### FEATURES

- Wide footprint
- High lug-to-void ratio
- Mono-block tread pattern

### BENEFITS

- Excellent stability in abrasive and rocky conditions
- Provides excellent durability and tread impact resistance
- Resists rubber chipping and chunking

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]															
	STATIC	CREEP	5 km/h 3 mph	10 km/h 6 mph	15 km/h 9 mph	20 km/h 12 mph	25 km/h 15 mph	30 km/h 18 mph	35 km/h 21 mph	40 km/h 24 mph	45 km/h 28 mph	50 km/h 31 mph	55 km/h 34 mph	60 km/h 37 mph	65 km/h 40 mph	
4.75	11700	9500	8300	7300	6350	6150	5850	5600	5400	5100	4890	4600	-	-	-	
69	25795	20945	18300	16095	14000	13560	12895	12345	11905	11245	10780	10140	-	-	-	
3.00	-	-	-	-	4750	4675	4600	4500	4425	4375	4325	4250	4125	3900	3525	
44	-	-	-	-	10470	10305	10140	9920	9755	9645	9535	9370	9095	8600	7770	
2.75	-	-	-	-	-	-	-	-	-	3350	-	3050	-	2750	2450	
40	-	-	-	-	-	-	-	-	-	7385	-	6725	-	6065	5400	
4.50	15200	12400	10800	9500	8250	8000	7600	7300	7050	6650	6365	5985	-	-	-	
65	33510	27335	23810	20945	18190	17635	16755	16095	15545	14660	14030	13195	-	-	-	
3.25	-	-	-	-	6720	6600	6480	6360	6240	6180	6120	6000	5800	5500	4975	
47	-	-	-	-	14815	14550	14285	14020	13755	13625	13490	13230	12785	12125	10970	
2.75	-	-	-	-	-	-	-	-	-	4500	-	4100	-	3700	3275	
40	-	-	-	-	-	-	-	-	-	9920	-	9040	-	8155	7220	
3.75	17400	14200	12400	10900	9500	9150	8700	8400	8050	7650	7305	6865	-	-	-	
54	38360	31305	27335	24030	20945	20170	19180	18520	17745	16865	16105	15135	-	-	-	
3.00	-	-	-	-	8200	8050	7900	7750	7600	7500	7450	7300	7100	6700	6050	
44	-	-	-	-	18080	17745	17415	17085	16755	16535	16425	16095	15655	14770	13340	
4.75	20000	16300	14300	12500	10900	10500	10000	9650	9250	8750	8375	7875	-	-	-	
69	44090	35935	31525	27560	24030	23150	22045	21275	20395	19290	18465	17360	-	-	-	
3.50	-	-	-	-	8950	8800	8650	8500	8300	8250	8150	8000	7750	7350	6650	
51	-	-	-	-	19730	19400	19070	18740	18300	18190	17970	17635	17085	16205	14660	
4.75	24800	20200	17700	15500	13500	13000	12400	11900	11500	10900	10385	9765	-	-	-	
69	54675	44535	39020	34170	29760	28660	27335	26235	25350	24030	22895	21530	-	-	-	
3.50	-	-	-	-	11200	11000	10800	10600	10400	10300	10200	10000	9700	9200	8300	
51	-	-	-	-	24690	24250	23810	23370	22930	22710	22485	22045	21385	20285	18300	





# CAMSO WHL 775

## A PREMIUM WHEEL LOADER TIRE DURABILITY SOLUTION

### FEATURES

- Extra-deep L5 lug tread
- Heavy-duty carcass
- Heavy-duty sidewall construction
- Contoured lug base

### BENEFITS

- Enhances durability and resistance to flat tires for extreme mixed and hard surface applications
- Increases stability and side impact resistance
- Protects against side impacts and deformation under heavy load
- Promotes stone ejection and resistance to cracking

### PERFORMANCE

#### TIRE LIFE



#### PUNCTURE RESISTANCE



#### TRACTION



#	TIRE SIZE	PR	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	TREAD CODE	SERVICE
				RECOMMENDED	ALTERNATIVE	O.D.	O.W.	O.T.D. [mm] [32nd]	S.L.R.	R.C.				
A	17.5-25	16	TL	14.00/1.5	14.00/1.3 13.00/1.4 (DC)	1403	448	62	649	4231	177	A2	L-5	LOADER-DOZER
						55.2	17.6	78	25.6	166.6				
B	20.5-25	20	TL	17.00/2.0	-	1563	532	77	711	4714	186	A2	L-5	LOADER-DOZER
						61.5	20.9	97	28.0	185.6				
C	23.5-25	20	TL	19.50/2.5	-	1670	597	88	768	5037	191	A2	L-5	LOADER-DOZER
						65.7	23.5	111	30.2	198.3				
D	26.5-25	28	TL	22.00/3.0	-	*	*	*	*	*	203	A2	L-3	LOADER-DOZER
						*	*	*	*	*				

#	INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]											
		STATIC	CREEP	5 km/h 3 mph	10 km/h 6 mph	15 km/h 9 mph	20 km/h 12 mph	25 km/h 15 mph	30 km/h 18 mph	35 km/h 21 mph	40 km/h 24 mph	45 km/h 28 mph	50 km/h 31 mph
A	4.75	11700	9500	8300	7300	6350	6150	5850	5600	5400	5100	4890	4600
	69	25795	20945	18300	16095	14000	13560	12895	12345	11905	11245	10780	10140
B	4.50	15200	12400	10800	9500	8250	8000	7600	7300	7050	6650	6365	5985
	65	33510	27335	23810	20945	18190	17635	16755	16095	15545	14660	14030	13195
C	3.75	17400	14200	12400	10900	9500	9150	8700	8400	8050	7650	7305	6865
	54	38360	31305	27335	24030	20945	20170	19180	18520	17745	16865	16105	15135
D	4.75	24800	20200	17700	15500	13500	13000	12400	11900	11500	10900	10385	9765
	69	54675	44535	39020	34170	29760	28660	27335	26235	25350	24030	22895	21530

# CONSTRUCTION TRACKS



# CAMSO MEX HXD

## EXTREME RESISTANCE TO SEVERE CONDITIONS

### FEATURES

- Patented 3S internal iron core
- High-tensile, rubber sealed steel cables protected by heavy-duty carcass and tread
- Curbshield technology with heavy-duty carcass

### BENEFITS


- Reduces unexpected downtime on the job site by preventing the initial degradation process
- Minimizes vibrations for better ride quality and lower maintenance cost
- Resists carcass punctures and cable corrosion to extend service life
- Maximizes service life prior to track degradation process triggered by edge cutting leading to iron core corrosion

### PERFORMANCE




WIDTH	PITCH	TREAD	GUIDING	METAL PIECE NAME	CARCASS THICKNESS	LUG HEIGHT	METAL PIECE TYPE	METAL PIECE SPECIFICATION
230	48	AH	I	KA	26.5	24.5	3S	STANDARD
300	55	AH	I	SA	35	27.5	3S	NARROW
		AH	I	WA	35	27.5	3S	WIDE
350	52.5	AH	I	WA	34	25	3S	STANDARD
400	72.5	AH	I	WA	43	27.5	3S	NARROW
		AH	I	EA	43	27.5	3S	WIDE
		AH	J	EA	45.5	27.5	3S RAIL TYPE	STANDARD
		AH	J	WA	47	27.5	3S OFFSET RAIL TYPE	STANDARD
450	71	AH	I	JA	48.5	30	3S	STANDARD
		AH	I	JA	49	30	3S	STANDARD
		AH	I	OA	46.5	30.5	3S	NARROW
		AH	I	AA	46.5	30.5	3S	WIDE
		AH	J	UA	47	27.5	3S OFFSET RAIL TYPE	STANDARD
485	92	AH	I	D	62.5	27	OFFSET	STANDARD
500	92	AB	I	D	58	30	STANDARD	STANDARD
		AH	I	DA	56	33	3S	STANDARD

## TREAD PATTERNS



AH




AB



# CAMSO MEX SD

PREDICTABLE SERVICE LIFE AND PERFORMANCE

## TREAD PATTERNS

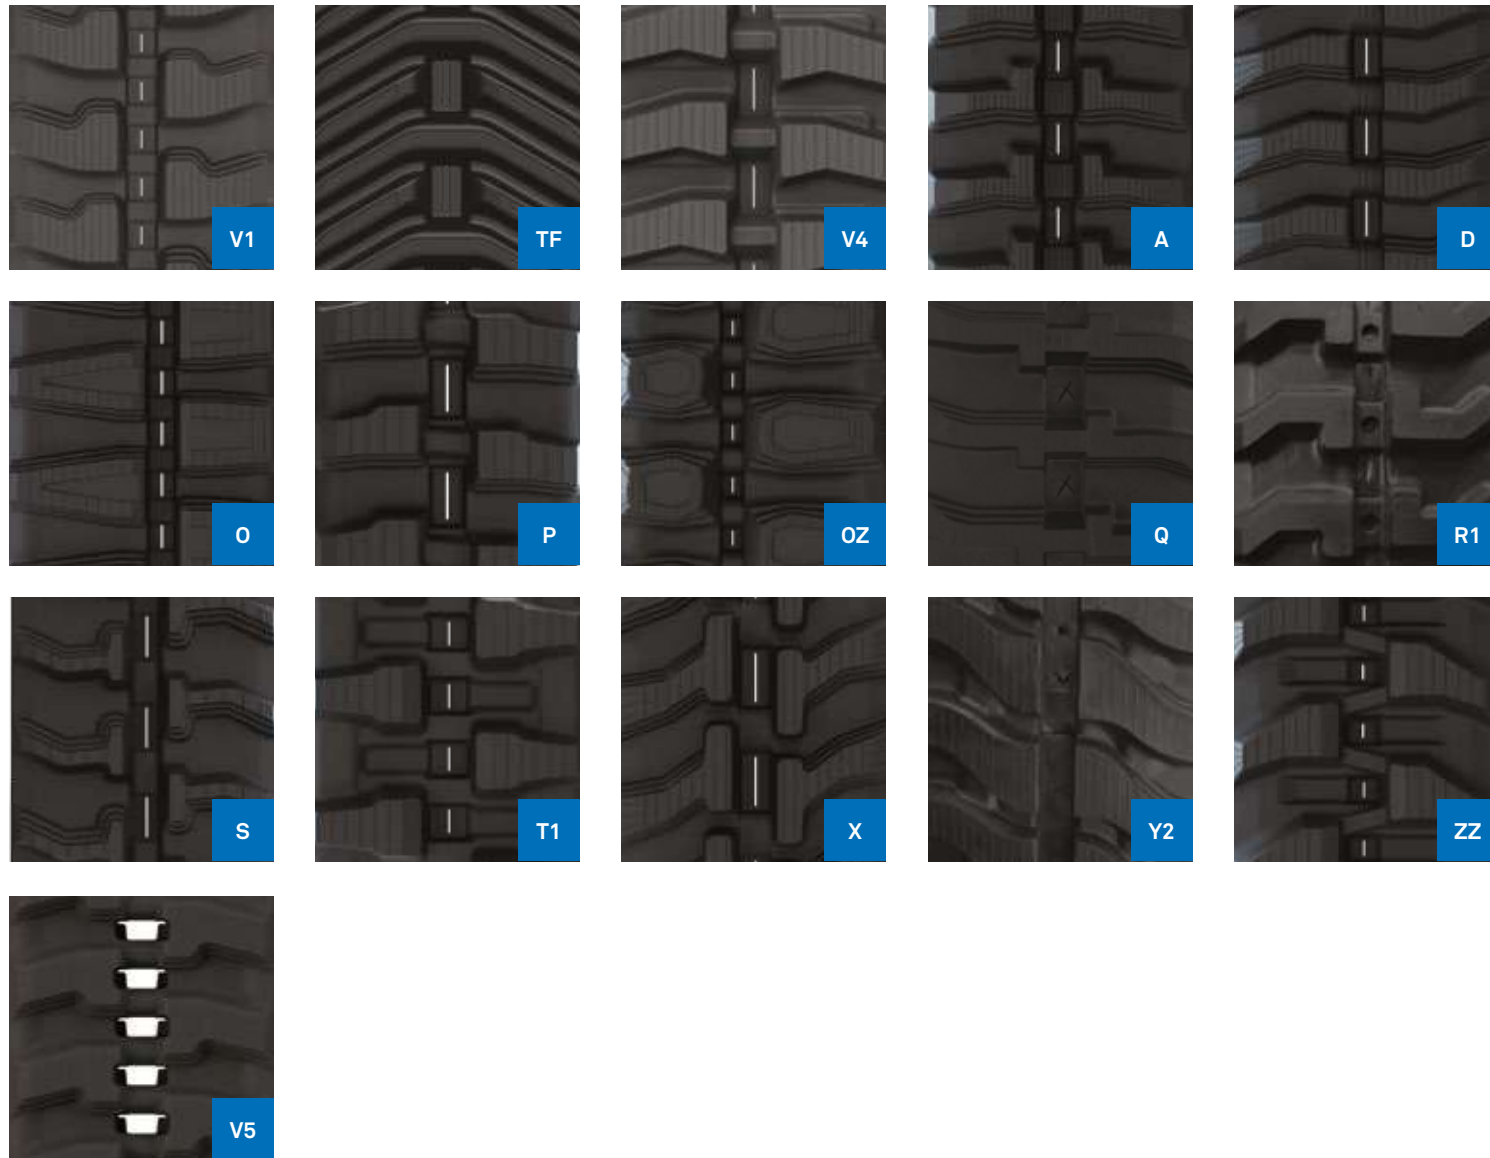

### FEATURES

- Patented 3S internal iron core
- High-tensile, rubber sealed steel cables
- Curbshield technology

### BENEFITS

- Eliminates detracking to avoid unexpected downtime on job site and to extend life of undercarriage components
- Minimizes vibrations for better ride quality and lower maintenance cost
- Resists carcass punctures and cable corrosion to extend service life
- Extends service life prior to track degradation process triggered by edge cutting leading to iron core corrosion

### PERFORMANCE



WIDTH	PITCH	TREAD	GUIDING	METAL PIECE NAME	CARCASS THICKNESS	LUG HEIGHT	METAL PIECE TYPE	METAL PIECE SPECIFICATION	
130	72	A	A	RB	18	15	STANDARD	STANDARD	
150	72	A	A	R	21	15	STANDARD	STANDARD	
180	60	S	A	F	16	13	STANDARD	STANDARD	
	72	X	A	R	20	15	STANDARD	STANDARD	
		P	B	R	21	17	STANDARD	STANDARD	
200	72	X	A	P	21	17	STANDARD	STANDARD	
		A	A	R	20	15	STANDARD	STANDARD	
		P	A	P	22	15	STANDARD	STANDARD	
		TF	A	P	23	10	STANDARD	STANDARD	
230	48	V4	J	P	24.5	17	RAIL TYPE	STANDARD	
		V1	I	KA	22	18	3S	STANDARD	
		T1	J	K	26	22	RAIL TYPE	STANDARD	
	72	ZZ	J	K	22.5	23	RAIL TYPE	STANDARD	
		V4	J	P2	21.5	17	RAIL TYPE	STANDARD	
		A	A	P	22	18	STANDARD	STANDARD	
250	47	B	A	P	22	18	STANDARD	STANDARD	
		V5	J	KA	26	18	3S RAIL TYPE	STANDARD	
		V1	I	KA	27	20	3S	STANDARD	
		OZ	J	KA	32	20	3S OFFSET RAIL TYPE	STANDARD	
	52.5	V1	I	SA	29	24	3S	NARROW	
		V1	J	SA	32.5	24	3S RAIL TYPE	STANDARD	
		D	A	P	24	17	STANDARD	STANDARD	
		72	B	A	P	24	17	STANDARD	STANDARD
300	52.5	R1	A	PR	30	18	STANDARD	STANDARD	
		V1	I	SA	31	23	3S	NARROW	
	V1	I	WA	31	23	3S	WIDE		
	53	V5	J	SA	32	25	3S RAIL TYPE	STANDARD	
	55	Y2	J	SF	36	25	RAIL TYPE	STANDARD	
320	100	O	J	SA	34	20	3S OFFSET RAIL TYPE	STANDARD	
		V1	J	SA	32.5	24	3S RAIL TYPE	STANDARD	
		Q	A	W	39	25	STANDARD	STANDARD	
350	52.5	V1	I	WA	30	22	3S	STANDARD	
	54.5	V1	J	WA	39	25	3S RAIL TYPE	STANDARD	
400	72.5	V1	I	WA	40	25	3S	NARROW	
		V1	I	EA	40	25	3S	WIDE	
		V1	J	EA	42	25	3S RAIL TYPE	STANDARD	
450	71	V1	I	JA	44	25	3S	STANDARD	
		81	V1	I	OA	42	28	3S	NARROW
			V1	I	AA	42	28	3S	WIDE



# CAMSO CTL HXD

## THE BEST TRACK FOR DURABILITY AND PERFORMANCE

### FEATURES

- Single-cure technology with next generation rubber compound
- Trackguard iron core with heavy-duty carcass
- Endless high-tensile steel cables
- Optimized tread pattern with next generation rubber compound

### BENEFITS

- Promotes even tread wearing for long, predictable tread life
- Improves rolling path life for reduced failures and enhanced durability
- Eliminates unexpected downtime due to cable/track breakage
- Maintains excellent traction throughout tread life

### PERFORMANCE

#### TREAD LIFE



#### FAILURE RESISTANCE






#### TRACTION



WIDTH	PITCH	TREAD	GUIDING	METAL PIECE NAME	CARCASS THICKNESS	LUG HEIGHT	METAL PIECE TYPE	METAL PIECE SPECIFICATION
180	72	TF	J	R	24	10	RAIL TYPE	STANDARD
		ST	J	R	23	18	RAIL TYPE	STANDARD
230	72	TF	J	R	24	10	RAIL TYPE	STANDARD
		ST	J	R	23	18	RAIL TYPE	STANDARD
300	84	HH	B	E	42	25	STANDARD	STANDARD
320	86	HH	B	E	51	26	STANDARD	STANDARD
		HH	J	W	34	30	RAIL TYPE	STANDARD
400	86	HH	B	E	51	26	STANDARD	STANDARD
450	86	HH	B	E	51	26	STANDARD	STANDARD
		HA	B	E	53.5	26	STANDARD	STANDARD
	100	HH	J	E	34	30	RAIL TYPE	STANDARD

## TREAD PATTERNS



# CAMSO CTL SD

## ALL-SEASON TRACTION AND DURABILITY

### FEATURES

- Single-cure technology with advanced rubber compound
- Trackguard iron core
- Endless high-tensile steel cables
- Versatile self-cleaning stepped tread design

### BENEFITS

- Promotes even tread wearing for long, predictable tread life
- Improves rolling path life for reduced failures and enhanced durability
- Eliminates unexpected downtime due to cable/track breakage
- Maintains good traction throughout tread life

### PERFORMANCE

#### TREAD LIFE



#### FAILURE RESISTANCE




#### TRACTION



WIDTH	PITCH	TREAD	GUIDING	METAL PIECE NAME	CARCASS THICKNESS	LUG HEIGHT	METAL PIECE TYPE	METAL PIECE SPECIFICATION
320	86	B	J	W	37	25	RAIL TYPE	STANDARD
		B	B	E	47	27	STANDARD	STANDARD
400	86	B	B	E	49	25	STANDARD	STANDARD
450	86	B	B	E	52	25	STANDARD	STANDARD
		B	J	E	32	25	RAIL TYPE	STANDARD

## TREAD PATTERNS



# CAMSO CTL SPROCKET



## OEM QUALITY AND PERFORMANCE AT AFTERMARKET PRICES

### FEATURES

- Enhanced hardening with deeper penetration
- Premium quality design and engineering
- Optimized geometry and design

### BENEFITS

- Provides longer sprocket wear
- Meets the toughest OEM specifications
- Ensures best fitment with tracks for longer track life

### PERFORMANCE



PID	PART NUMBER	MACHINE BRAND	MODEL	NUMBER OF BOLT HOLES	NUMBER OF TEETH	PITCH ([mm])	SHAPE B=BELL F=FLAT	ID	WEIGHT (kg)
147.14.14	SP-015086BB	Bobcat	T180*, T180H*, T190*, T190H*	6	15	86	B	B	23
147.6.6	SP-017086BA	Bobcat	864, T200, T250, T250H, T300, T300H, T320, T630, T650, T750, T770	12	17	86	B	A	28
147.11.11	SP-017086FE	Case New Holland	445CT, 450CT, TR270, TR310, TR320, TR340, TV380, C175, C185, C190, C227, C232, C238 LT175B, LT185B, LT190B	9	17	86	F	E	24
147.2.2	SP-015086FA	CAT	259, 259D	8	15	86	F	A	14
147.8.8	SP-017086FB	CAT	269C, 279C, 279C2, 279D, 289C, 289C2, 289D, 299C, 299D, 299D XHP	9	17	86	F	B	20
147.4.4	SP-016086FA	John Deere	CT 319D*, CT 322, CT 323D*	6	16	86	F	A	18
147.9.9	SP-017086FC	John Deere	CT 329D*, CT 332, CT 333D*	10	17	86	F	C	22
147.7.7	SP-017086FA	John Deere	CT 319D*, CT 323D*, CT 329D*, CT 333D*	12	17	86	F	A	20
147.3.3	SP-015086FB	Kubota	SVL75	8	15	86	F	B	17
147.10.10	SP-017086FD	Kubota	SVL90	9	17	86	F	D	22
147.5.5	SP-016086FB	Gehl Mustang Takeuchi	CTL 60, CTL 65 MTL 16, MTL 316 TL 130, TL 230	8	16	86	F	B	17

# CAMSO MTL HXD



## ENHANCED DURABILITY AND PROTECTION

### FEATURES

- Single cure technology combined with duradrive internal fabric reinforced design
- Heavy duty carcass construction
- Versatile tread pattern matched with advanced rubber compound

### BENEFITS

- Protects against drive lug failures to add an extra season and complete tread life utilization
- Increases lateral stability to eliminate detracking for less downtime
- Maintains good traction throughout tread life

### PERFORMANCE



WIDTH		LENGTH		PITCH		NUMBER OF DRIVE LUGS	TREAD
[mm]	[inches]	[mm]	[inches]	[mm]	[inches]		
381	15	4216	166	100	4	42	MTL1
457	18	5080	200	100	4	51	MTL2
		5588	220			56	
		5105	201			51	

### TREAD PATTERNS



\*Verify exact fitment with the machine serial number at: <https://camso.co/en/products-solutions/construction>



# CAMSO OTT HXD

## QUICK MOUNT ATTACHMENT FOR TRACKED PERFORMANCE

### FEATURES

- Full rubber track
- Embedded iron core with engineered wing design
- Full width, continuous rubber track footprint
- Internal traction rib

### BENEFITS

- Allows operation on asphalt, concrete and turf surfaces without damage or marking
- Avoids detracking like a non-reinforced all rubber OTT
- Increases flotation by as much as 5 times that of tires and by, at least, twice as much as standard steel tracks
- Provides high traction between tire and track and prevents tire wear

### PERFORMANCE



WIDTH		PITCH		LINKS	CARCASS THICKNESS	LUG HEIGHT
[mm]	[inches]	[mm]	[inches]			
254	10	152.4	6	26	25	32
				27		
				28		
				29		
				31		
304.8	12	152.4	6	29	25	32
				30		
				31		
				32		
				33		

## TREAD PATTERNS



OTT



# CAMSO HXD SMOOTH

## DURABILITY AT ITS BEST

### FEATURES

- Single-cure technology with next generation rubber compound
- Optimized multi layer internal construction
- Smooth tread pattern with heavy duty carcass

### BENEFITS

- Promotes even tread wearing for long, predictable tread life
- Improves weight distribution with better lateral stiffness
- Increases track life

### PERFORMANCE



WIDTH		LENGTH		CARCASS THICKNESS		TREAD THICKNESS		TOTAL THICKNESS		TREAD
[mm]	[inches]	[mm]	[inches]	[mm]	[inches]	[mm]	[inches]	[mm]	[inches]	
400	15.75	8049	317	27.5	1.1	30.5	1.2	58	2.3	Smooth
406	16	6921	272.5	30	1.2	21	0.8	51	2	Smooth
457	18	8049	317	27.5	1.1	30.5	1.2	58	2.3	Smooth

## SIDE VIEW





# CAMSO HXD CHEVRON

## DURABILITY MEETS TRACTION

### FEATURES

- Single-cure technology with next generation rubber compound
- Optimized multi layer internal construction
- Chevron type tread pattern

### BENEFITS

- Promotes even tread wearing for long, predictable tread life
- Improves weight distribution with better lateral stiffness
- Provides high traction in softer surfaces

### PERFORMANCE

#### TREAD LIFE



#### FAILURE RESISTANCE



#### TRACTION



WIDTH		LENGTH		CARCASS THICKNESS		TREAD THICKNESS		TOTAL THICKNESS		TREAD
[mm]	[inches]	[mm]	[inches]	[mm]	[inches]	[mm]	[inches]	[mm]	[inches]	
400	15.75	8049	317	23.5	0.9	38	1.5	61.5	2.4	Chevron
406	16	6921	272.5	23.5	0.9	38	1.5	61.5	2.4	Chevron
457	18	8049	317	23.5	0.9	38	1.5	61.5	2.4	Chevron

## SIDE VIEW



# CAMSO CARRIER HXD

## TOP PERFORMANCE AND UPTIME

### FEATURES

- First and only endless steel cable in the market
- Trackguard iron core
- Straight bar tread pattern
- Next generation rubber compound

### BENEFITS

- Protects from joint failures to avoid unexpected downtime
- Improves rolling path life for reduced failures and enhanced durability
- Provides optimal traction
- Promotes even tread wearing for long, predictable tread life

### PERFORMANCE

#### TREAD LIFE



#### FAILURE RESISTANCE



#### TRACTION




WIDTH	PITCH	TREAD	GUIDING	METAL PIECE	CARCASS THICKNESS	LUG HEIGHT	METAL PIECE TYPE	METAL PIECE SPECIFICATION
350	100	A1	B	E	42	27	STANDARD	STANDARD
700	100	A2	B	T	66	32	STANDARD	STANDARD
750	150	A2	B	T	80	36	STANDARD	STANDARD

## TREAD PATTERNS



A1



A2

# COMPLETE LINE OVERVIEW





SKID STEER LOADERS



CAMSO SKS 732 CAMSO SKS 532 CAMSO SKS 332 CAMSO SKS 753 CAMSO SKS 775 CAMSO SKS 511 CAMSO SKS 792S CAMSO SKS 782S



CAMSO SKS 793S CAMSO SKS 796S CAMSO SKS 786S

BACKHOE LOADERS



CAMSO SL R4 CAMSO BHL 532 CAMSO BHL 753 CAMSO BHL 530

TELESCOPIC HANDLERS



CAMSO TLH 732 CAMSO TLH 532 CAMSO TLH 753 CAMSO TLH 792S

TELESCOPIC HANDLERS, COMPACT WHEEL LOADERS AND MINI-DUMPERS



CAMSO TM R4 CAMSO MPT 753 CAMSO 4L R1 CAMSO TM R1 CAMSO MPT 793S

WHEEL EXCAVATORS



CAMSO WL CAMSO WEX 552 CAMSO WEX 583S

COMPACTION EQUIPMENT



CAMSO CMP 533 CAMSO CMP 576

MINE SERVICE TIRES



CAMSO MST 776 SOLIDEAL HAULER LT SOLIDEAL RES 550 Magnum Series

WHEEL LOADERS, ARTICULATED DUMP TRUCKS AND MOTOR GRADERS



CAMSO WHL 753R CAMSO ADT 753R CAMSO WHL 775R CAMSO WHL 776R CAMSO LM L2 CAMSO LM L3 CAMSO WHL 773 CAMSO WHL 775

RADIAL

TRACKS FOR MINI-EXCAVATORS



CAMSO MEX HXD

TRACKS FOR COMPACT TRACK LOADERS



CAMSO CTL HXD

SPROCKETS FOR CTL'S



CAMSO CTL SPROCKET

CAMSO MEX SD

CAMSO CTL SD

TRACKS FOR MULTI-TERRAIN LOADERS



CAMSO MTL HXD

OTT TRACKS FOR SKID STEER LOADERS



CAMSO OTT HXD

TRACKS FOR PAVERS




CAMSO HXD SMOOTH CAMSO HXD CHEVRON

TRACKS FOR CARRIERS



CAMSO CARRIER HXD

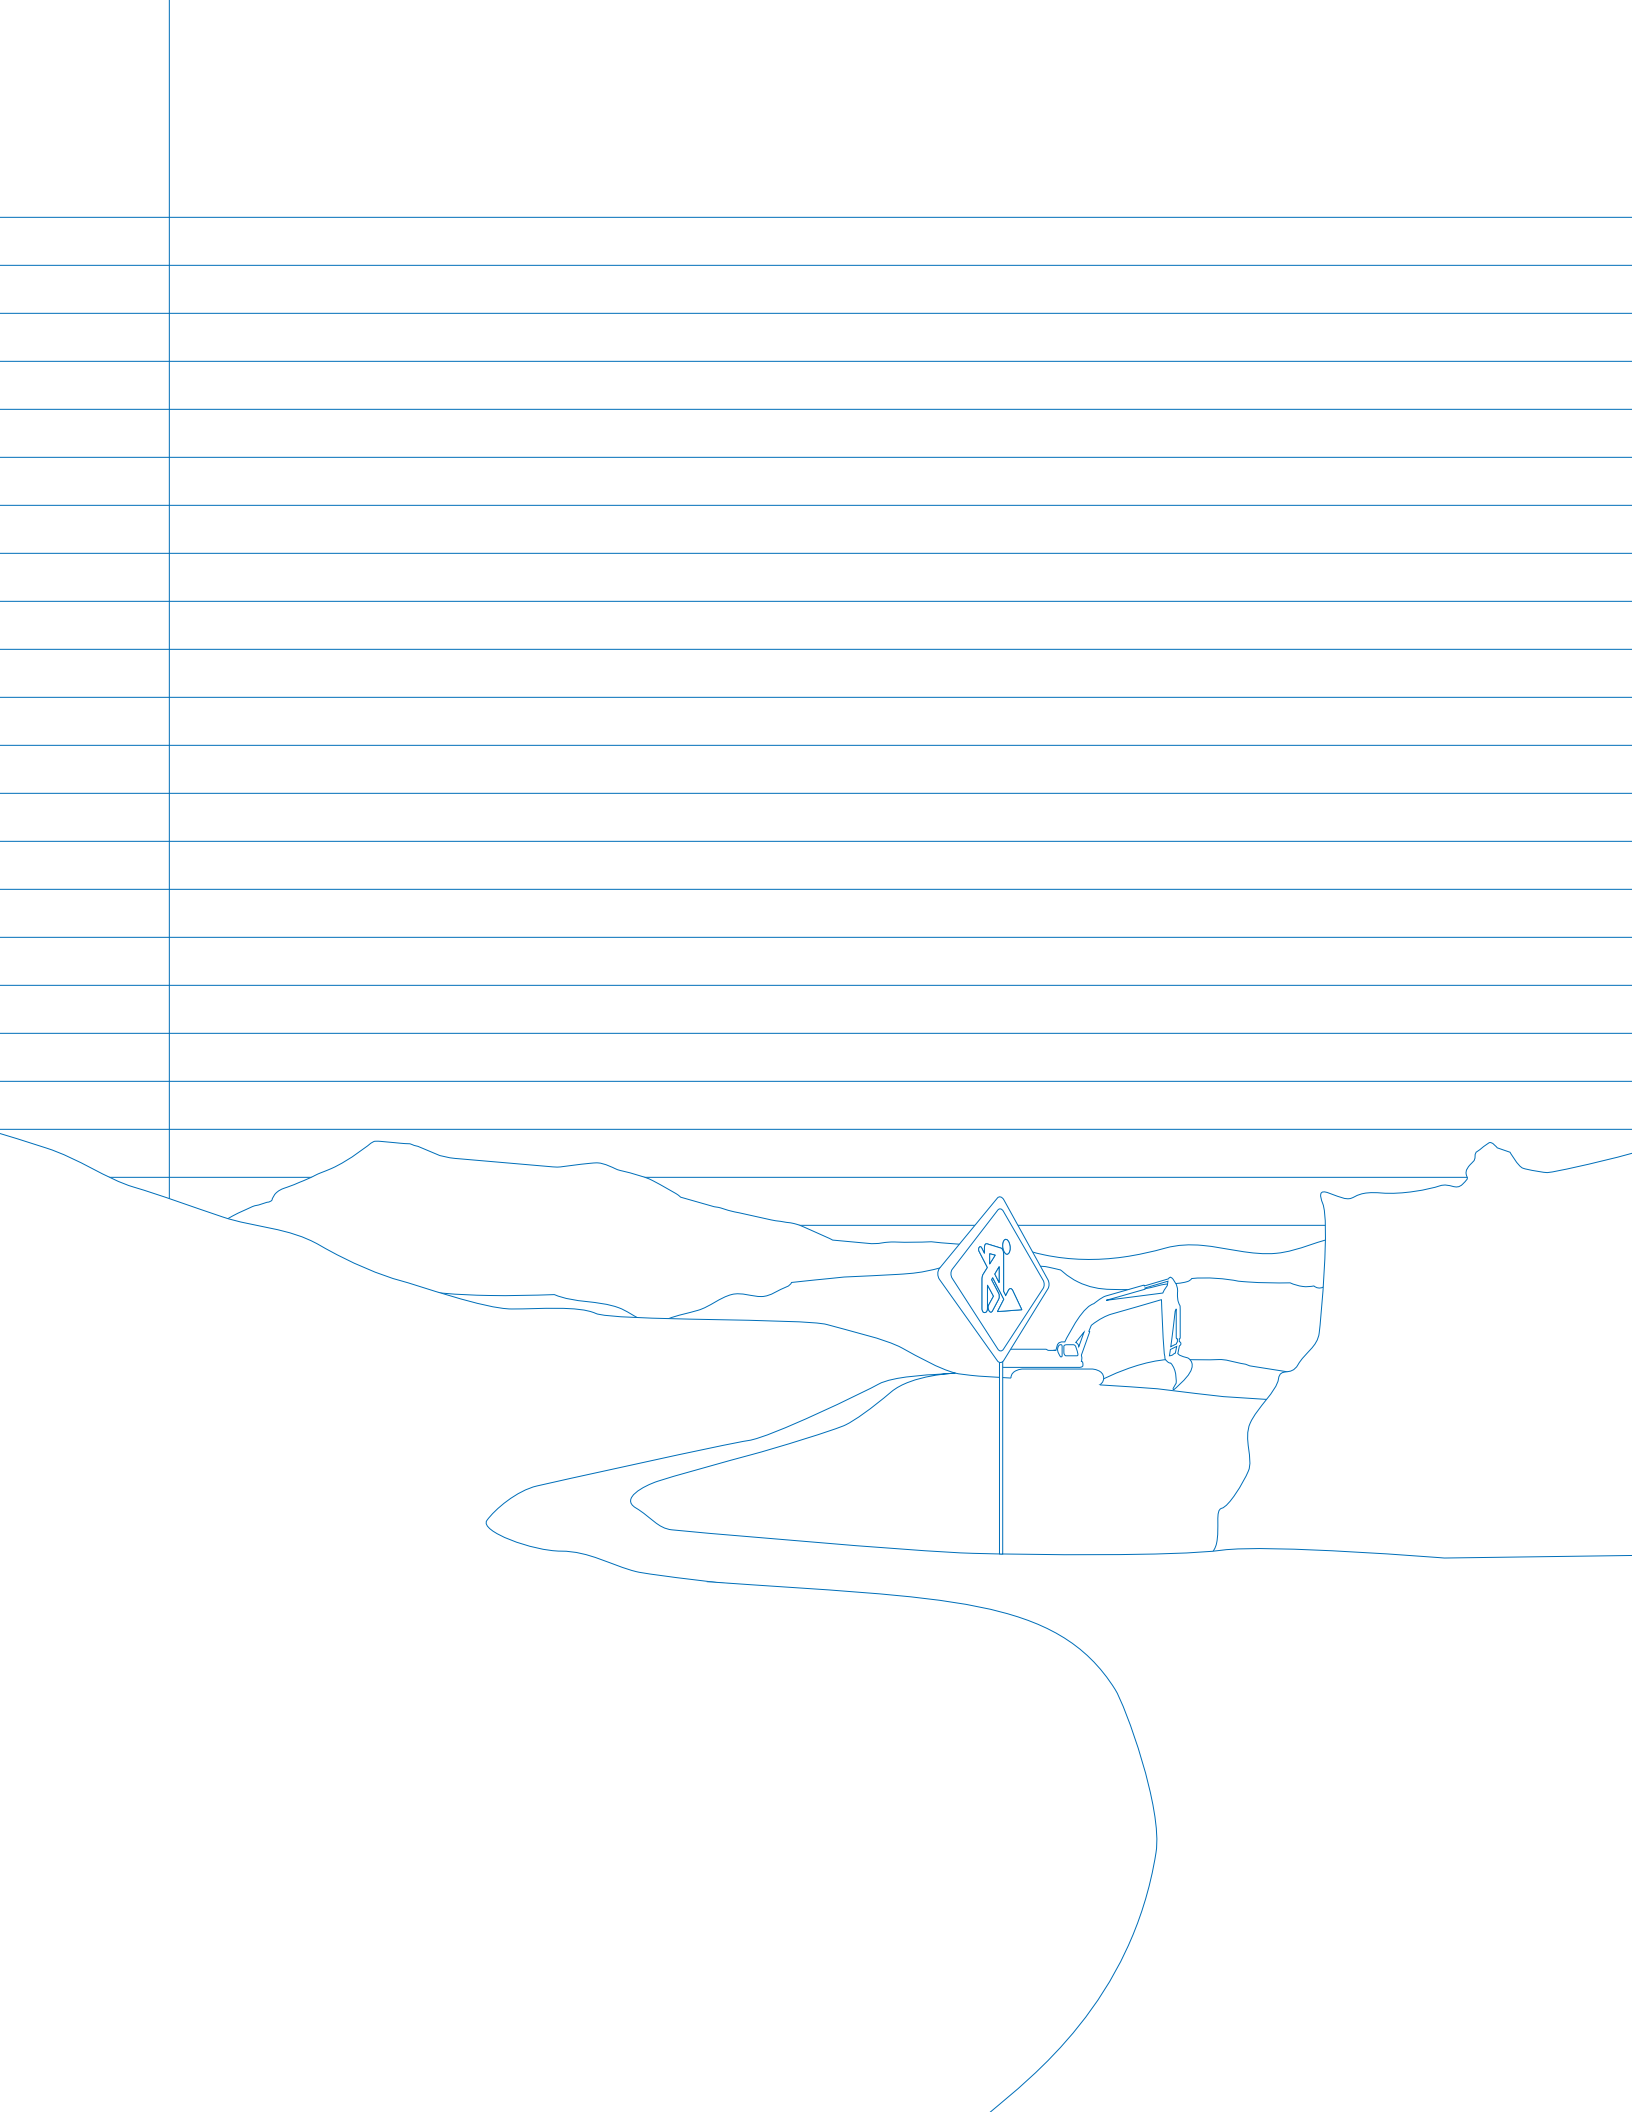

# TOUGH IS OUR WAY OF LIFE

